arXiv:1304.1692v1 [cs.IT] 5 Apr 2013

Short Message Noisy Network Coding

Jie Hou and Gerhard Kramer
Institute for Communications Engineering
Technische Universität München, 80290 Munich, Germany
Email: {jie.hou, gerhard.kramer}@tum.de

***Abstract*—Short message noisy network coding (SNNC) differs from noisy network coding (NNC) in that one transmits many short messages in blocks rather than using one long message with repetitive encoding. Several properties of SNNC are developed. First, SNNC achieves the same rates as NNC for memoryless networks where each node transmits a multicast message. Second, SNNC permits backward decoding which helps to understand the achievable rate region. The analysis shows that each decoder may ignore certain nodes rather than decoding the messages of all nodes. Third, SNNC enables early decoding if the channel quality happens to be good. This leads to mixed strategies that unify the advantages of decode-forward (DF) and NNC.**

***Index Terms*—Capacity, network coding, relaying, quantization.**

I. INTRODUCTION

Noisy Network Coding (NNC) [1] extends network coding from noiseless to noisy networks. For example, NNC includes the results of [2]–[5] as special cases. NNC uses three techniques from [5]:

- **Sources** use repetitive encoding with *long* messages.
- **Relays** quantize without hashing (or binning) which we refer to as quantize-forward (QF).
- **Destinations** decode messages and quantization bits jointly rather than sequentially.

One important drawback of long messages is that they inhibit decode-forward (DF) at relays even if the channel conditions are good [6]. For example, if one relay is close to the source and has a strong source-relay link, then the natural operation is DF which removes the noise at the relay. But this is generally not possible with a long message because of its high rate.

Fortunately, long messages are not needed and a variant called short message NNC (SNNC) works just as well [6]–[8]. SNNC has:

- **Sources** transmit independent short messages in blocks (the same method was used [9, Appendix D]).
- **Relays** perform QF but perhaps with hashing (or binning) which is called compress-forward (CF). Note that QF is a special case of CF with binning rate zero.
- **Destinations** use backward decoding (or joint decoding or any other type of decoding).

SNNC with CF and step-by-step decoding was studied for relay networks in [9, Sec. V] and [10, Sec. 3.3.3]. We remark that the name of the relaying operation (DF, CF, QF, NNC, SNNC) should not depend on which *decoder* is used at the *destination* but is a generic name for the *processing* at the *relay*. Indeed, the choice of decoder turns out to be important for NNC [1], [5] and SNNC [8].

The main goals of this work are to simplify and extend the unicast results of [8] and [6], [7] by showing that SNNC achieves the same rates as NNC for memoryless networks with *multiple multicast* sessions. We find that SNNC has constraints that do not appear for NNC, but we show that these constraints are redundant. Furthermore, we show that these "extra" constraints give insight about the optimal decoding procedure. For example, for a fixed random coding distribution there exists at each destination node an *optimal decodable set* [8] of messages that should be decoded to achieve the best rates.

This paper is organized as follows. In Section II, we state the problem. In Section III, we show that SNNC achieves the same rates as NNC for memoryless networks with multiple multicast sessions. In Section IV, we discuss the results and relate them to other work. In Section V, we present coding schemes for mixed strategies that allow relay nodes to switch between DF and QF depending on the channel conditions. Results on Gaussian networks are discussed in Section VI. Finally, Section VII concludes the paper.

II. PRELIMINARIES

Random variables are written with upper case letters and their realizations with the corresponding lower case letters. Bold letters refer to random vectors and their realizations. A random variable X has distribution P_X. We write probabilities with subscripts $P_X(x)$ but we drop the subscripts if the arguments of the distributions are lower case versions of the random variables. For example, we write $P(x) = P_X(x)$. Calligraphic letters denote sets, e.g., we write $\mathcal{K} = \{1, 2, \ldots, K\}$. The size of a set $\mathcal{S}$ is denoted as $|\mathcal{S}|$ and the complement set of $\mathcal{S}$ is denoted as $\mathcal{S}^{\mathrm{c}}$. Subscripts on a symbol denote the symbol's source and the position of the symbol in a sequence. For instance, X_{ki} denotes the i-th output of the k-th encoder. Superscripts denote finite-length sequences of symbols, e.g., $x_k^n = (x_{k1}, \ldots, x_{kn})$. Set subscripts denote vectors of letters, e.g., $X_{\mathcal{S}} = [X_k : k \in \mathcal{S}]$. We use $T_\epsilon^n(P_X)$ to denote the set of letter-typical sequences of length n with respect to the probability distribution P_X and the non-negative number ϵ [11, Ch. 3], [12].

Consider the K-node memoryless network depicted in Fig. 1 where each node has one message only. This model

---

Version: April 03, 2013. This paper was in part presented at the IEEE International Symposium on Information Theory, Boston, MA, July 2012. J. Hou and G. Kramer were supported by an Alexander von Humboldt Professorship endowed by the German Federal Ministry of Education and Research. G. Kramer was also supported by NSF Grant CCF-09-05235.

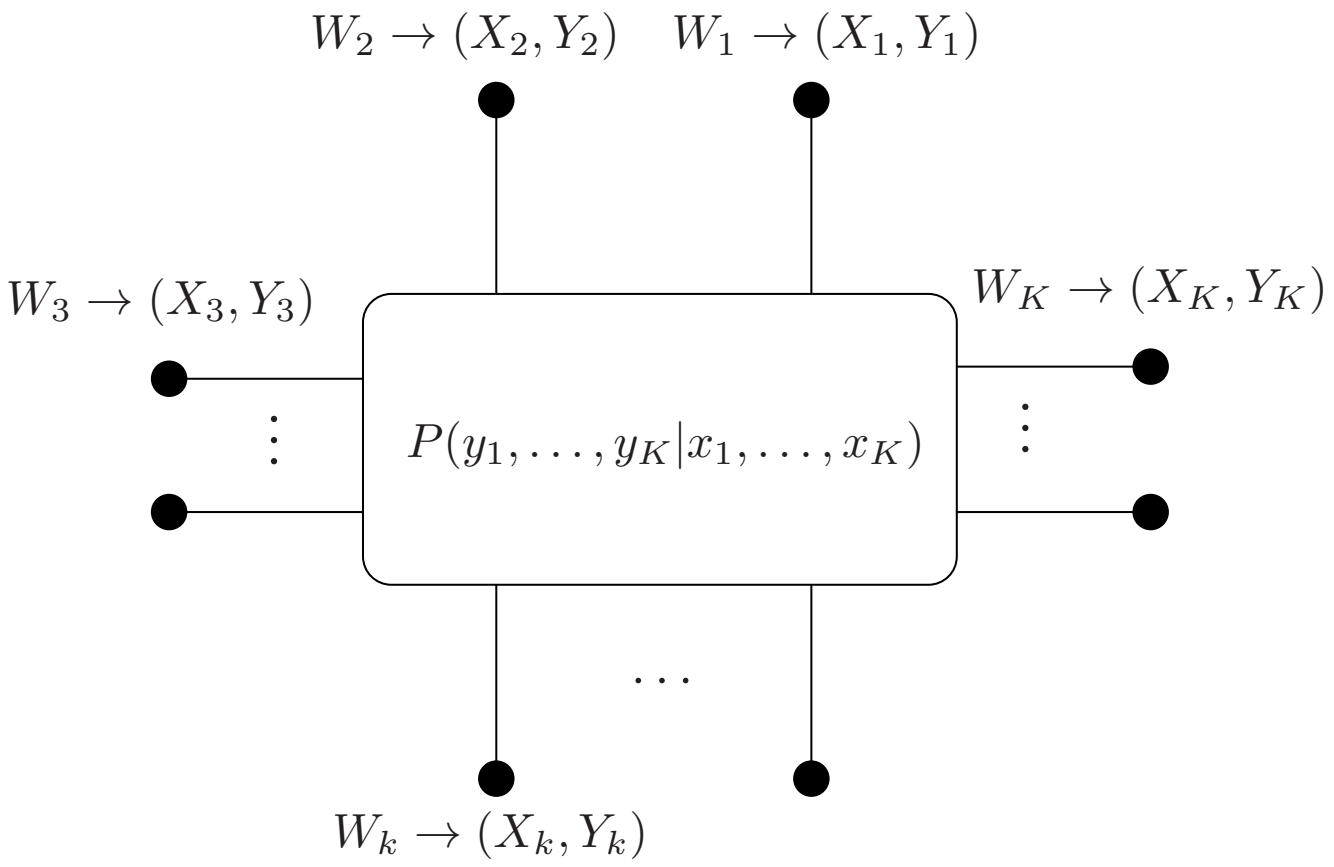

Fig. 1. A K-node memoryless network. The network is a DMN if the alphabets of X_k and Y_k are discrete and finite for $k = 1, \ldots, K$.

does not include broadcasting messages and was used in [1] and [13, Ch. 15] . Node k, $k \in \mathcal{K}$, has a message W_k destined for nodes in the set $\mathcal{D}_k$, $\mathcal{D}_k \subseteq \mathcal{K} \setminus \{k\}$, while acting as a relay for messages of the other nodes. We write the set of nodes whose signals node k must decode correctly as $\widetilde{\mathcal{D}}_k = \{i \in \mathcal{K} : \ k \in \mathcal{D}_i\}$. The messages are mutually statistically independent and W_k is uniformly distributed over the set $\{1, \ldots, 2^{nR_k}\}$, where 2^{nR_k} is taken to be a non-negative integer.

The channel is described by the conditional probabilities

$$P(y^K|x^K) = P(y_1, \ldots, y_K|x_1, \ldots, x_K) \tag{1}$$

where $\mathcal{X}_k$ and $\mathcal{Y}_k$, $k \in \mathcal{K}$, are the respective input and output alphabets, i.e., we have

$$\begin{aligned}(x_1, \ldots, x_K) &\in \mathcal{X}_1 \times \cdots \times \mathcal{X}_K \\ (y_1, \ldots, y_K) &\in \mathcal{Y}_1 \times \cdots \times \mathcal{Y}_K.\end{aligned}$$

If all alphabets are discrete and finite sets, then the network is called a *discrete* memoryless network (DMN) [14], [15, Ch.18]. As usual, we develop our random coding for DMNs and later extend the results to Gaussian channels. Node k transmits $x_{ki} \in \mathcal{X}_k$ at time i and receives $y_{ki} \in \mathcal{Y}_k$. The channel is *memoryless* and *time invariant* in the sense that

$$\begin{aligned}&P(y_{1i}, \ldots, y_{Ki}|w_1, \ldots, w_K, x_1^i, \ldots, x_K^i, y_1^{i-1}, \ldots, y_K^{i-1}) \\ &\quad = P_{Y^K|X^K}(y_{1i}, \ldots, y_{Ki}|x_{1i}, \ldots, x_{Ki})\end{aligned} \tag{2}$$

for all i.

We can represent the DMN as a directed graph $\mathcal{G} = \{\mathcal{K}, \mathcal{E}\}$, where $\mathcal{E} \subset \mathcal{K} \times \mathcal{K}$ is a set of edges. Edges are denoted as $(i, j) \in \mathcal{E}, \ i, j \in \mathcal{K}, \ i \neq j$. We label edge (i, j) with the non-negative real number

$$C_{ij} = \max_{x_{\mathcal{K}\setminus i}} \max_{P_{X_i}} I(X_i; Y_j | X_{\mathcal{K}\setminus i} = x_{\mathcal{K}\setminus i}) \tag{3}$$

called the capacity of the link, where $I(A; B|C = c)$ is the mutual information between the random variables A and B conditioned on the event $C = c$. Let $\text{Path}_{(i,j)}$ be a path that starts from node i and ends at node j. Let $\Gamma_{(i,j)}$ to be the set of such paths. We write $(k, \ell) \in \text{Path}_{(i,j)}$ if (k, ℓ) lies on the path $\text{Path}_{(i,j)}$. We may communicate reliably between nodes i and j if

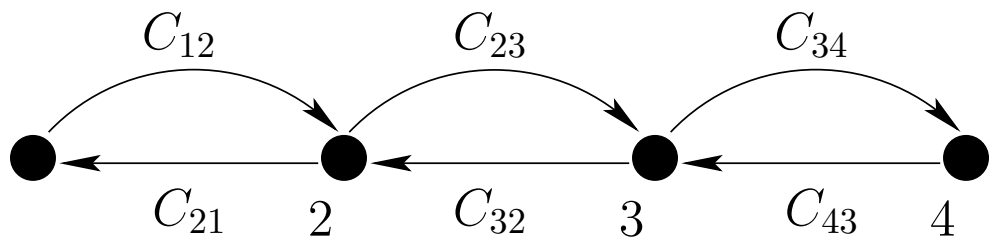

Fig. 2. A line network with 4 nodes. Each node can communicate reliably with any other node as long as $C_{ij} > 0$ for all i, j.

$$R_{ij} = \max_{\text{Path}_{(i,j)} \in \Gamma_{(i,j)}} \min_{(k,l) \in \text{Path}_{(i,j)}} C_{kl} \tag{4}$$

is positive. We assume that $R_{ij} > 0$ for all nodes i with a message destined for node j. Observe that if $C_{ij} > 0$ for all i, j, then at most $K - 1$ hops are needed for node i to reliably convey its message at rate

$$\min_{j \in \mathcal{K}} R_{ij} \tag{5}$$

by multihopping to all other nodes in the network. Hence, for a K-node memoryless network at most $K(K-1)$ hops are needed for all nodes to "flood" their messages by multihopping through the network.

Example 1: A line network with 4 nodes is depicted in Fig. 2. Node 1 has a message for node 4 and we assume that $C_{12} > 0$, $C_{23} > 0$ and $C_{34} > 0$ so that node 1 can communicate reliably to node 4 by multihopping through nodes 2 and 3 with 3 hops.

We define two types of functions for each node k:

- n encoding functions $f_k^n = (f_{k1}, \ldots, f_{kn})$ that generate channel inputs based on the local message and past channel outputs
$$X_{ki} = f_{ki}(W_k, Y_k^{i-1}), \ i = \{1, \ldots, n\}. \tag{6}$$
- One decoding function
$$g_k(Y_k^n, W_k) = [\hat{W}_i^{(k)}, \ i \in \widetilde{\mathcal{D}}_k] \tag{7}$$
where $\hat{W}_i^{(k)}$ is the estimate of W_i at node k.

The average error probability for the network is defined as

$$P_e^{(n)} = \Pr\left[\bigcup_{k \in \mathcal{K}} \bigcup_{i \in \widetilde{\mathcal{D}}_k} \{\hat{W}_i^{(k)} \neq W_i\}\right]. \tag{8}$$

A rate tuple $(R_1, \ldots, R_K)$ is achievable for the DMN if for any $\epsilon > 0$, there is a sufficiently large integer n and some functions $\{f_k^n\}_{k=1}^K$ and $\{g_k\}_{k=1}^K$ such that $P_e^{(n)} \leq \epsilon$. The capacity region is the closure of the set of achievable rate tuples. For each node k we define

$$\mathcal{K}_k = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k, \ \mathcal{T}_k \subseteq \widetilde{\mathcal{D}}_k^{\mathsf{c}} \setminus \{k\} \tag{9}$$

where $\mathcal{T}_k$ has the nodes whose messages node k is not interested in but whose symbol sequences are included in the typicality test in order to remove interference. We further define, for any $\mathcal{S} \subset \mathcal{L} \subseteq \mathcal{K}$, the quantities

$$I_{\mathcal{S}}^{\mathcal{L}}(k) = I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathsf{c}}} Y_k | X_{\mathcal{S}^{\mathsf{c}}}) - I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_{\mathcal{L}} \hat{Y}_{\mathcal{S}^{\mathsf{c}}} Y_k) \tag{10}$$

$$I_{\mathcal{S}}^{\mathcal{L}}(k|T) = I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathsf{c}}} Y_k | X_{\mathcal{S}^{\mathsf{c}}} T) - I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_{\mathcal{L}} \hat{Y}_{\mathcal{S}^{\mathsf{c}}} Y_k T) \tag{11}$$

Block	1	$\cdots$	B	$B+1 \cdots\ B+K\cdot(K-1)$
X_1	$\mathbf{x}_{11}(w_{11},1)$	$\cdots$	$\mathbf{x}_{1B}(w_{1B},l_{1(B-1)})$	
$\hat{Y}_1$	$\hat{\mathbf{y}}_{11}(l_{11}\|w_{11},1)$	$\cdots$	$\hat{\mathbf{y}}_{1B}(l_{1B}\|w_{1B},l_{1(B-1)})$	
$\vdots$	$\vdots$	$\vdots$	$\vdots$	Multihop K messages to $K-1$ nodes in $K\cdot(K-1)\cdot n'$ channel uses
X_K	$\mathbf{x}_{K1}(w_{K1},1)$	$\cdots$	$\mathbf{x}_{KB}(w_{KB},l_{K(B-1)})$	
$\hat{Y}_K$	$\hat{\mathbf{y}}_{K1}(l_{K1}\|w_{K1},1)$		$\hat{\mathbf{y}}_{KB}(l_{KB}\|w_{KB},l_{K(B-1)})$	

TABLE I
SNNC FOR ONE MULTICAST SESSION PER NODE.

where $\mathcal{S}^{\rm c}$ in (10) and (11) is the complement of $\mathcal{S}$ in $\mathcal{L}$. We write $R_{\mathcal{S}} = \sum_{k\in\mathcal{S}} R_k$.

III. MAIN RESULT AND PROOF

The following theorem is the main result of this paper.

Theorem 1: For a K-node memoryless network with one multicast session per node, SNNC achieves the same rate tuples $(R_1,\ldots,R_K)$ as NNC, namely the rate tuples satisfying

$$0 \le R_{\mathcal{S}} <\ I_{\mathcal{S}}^{\mathcal{K}_k}(k|T) \tag{12}$$

for all $k\in\mathcal{K}$, all subsets $\mathcal{S}\subset\mathcal{K}_k$ with $k\in\mathcal{S}^{\rm c}$ and $\mathcal{S}\cap\widetilde{\mathcal{D}}_k\neq\emptyset$, where $\mathcal{S}^{\rm c}$ is the complement of $\mathcal{S}$ in $\mathcal{K}_k$, and for joint distributions that factor as

$$P(t)\left[\prod_{k=1}^{K} P(x_k|t)P(\hat{y}_k|y_k,x_k,t)\right]P(y^K|x^K). \tag{13}$$

Remark 1: The set $\mathcal{K}_k$ (see (9)) represents the set of nodes whose messages are known or decoded at node k. In other words, from node k's perspective the network has nodes $\mathcal{K}_k$ only.

Example 2: If $\mathcal{D}=\mathcal{D}_1=\cdots=\mathcal{D}_K$, then the bound (12) is taken for all $k\in\mathcal{K}$ and all subsets $\mathcal{S}\subset\mathcal{K}_k$ with $k\in\mathcal{S}^{\rm c}$ and $\mathcal{S}\cap\mathcal{D}\neq\emptyset$, where $\mathcal{S}^{\rm c}$ is the complement of $\mathcal{S}$ in $\mathcal{K}_k$.

Example 3: Consider $\mathcal{K}=\{1,2,3,4\}$ and suppose node 1 has a message destined for node 3, and node 2 has a message destined for node 4. We then have $\widetilde{\mathcal{D}}_3=\{1\}$ and $\widetilde{\mathcal{D}}_4=\{2\}$. If nodes 3 and 4 choose $\mathcal{T}_3=\{2\}$ and $\mathcal{T}_4=\{\emptyset\}$ respectively, then we have $\mathcal{K}_3=\{1,2,3\}$ and $\mathcal{K}_4=\{2,4\}$. In this case the rate bounds (12) are:
Node 3:

$$R_1 < I(X_1;\hat{Y}_2\hat{Y}_3Y_3|X_2X_3T) \tag{14}$$

$$R_1+R_2 < I(X_1X_2;\hat{Y}_3Y_3|X_3T) - I(\hat{Y}_1\hat{Y}_2;Y_1Y_2|X_1X_2X_3\hat{Y}_3Y_3T) \tag{15}$$

Node 4:

$$R_2 < I(X_2;\hat{Y}_4Y_4|X_4T) - I(\hat{Y}_2;Y_2|X_2X_4\hat{Y}_4Y_4T) \tag{16}$$

To prove Theorem 1, we choose $\mathcal{K}_k=\mathcal{K}$ for all k for simplicity. We later discuss the case where these sets are different. For clarity, we set the time-sharing random variable T to be a constant. Table I shows the SNNC encoding process. We redefine R_k to be the rate of the short messages in relation to the (redefined) block length n. In other words, the message $w_k, k\in\mathcal{K}$, of nBR_k bits is split into B equally sized blocks, $w_{k1},\ldots,w_{kB}$, each of nR_k bits. Communication takes place over $B+K\cdot(K-1)$ blocks and the true rate of w_k will be

$$R_{k,\text{true}} = \frac{nBR_k}{nB+[K\cdot(K-1)\cdot n']} \tag{17}$$

where n' is defined in (20) below.

Random Code: Fix a distribution $\prod_{k=1}^{K}P(x_k)P(\hat{y}_k|y_k,x_k)$. For each block $j=1,\ldots,B$ and node $k\in\mathcal{K}$, generate $2^{n(R_k+\hat{R}_k)}$ codewords $\mathbf{x}_{kj}(w_{kj},l_{k(j-1)})$, $w_{kj}=1,\ldots,2^{nR_k}, l_{k(j-1)}=1,\ldots,2^{n\hat{R}_k}$, according to $\prod_{i=1}^{n}P_{X_k}(x_{(kj)i})$ where $l_{k0}=1$ by convention. For each w_{kj} and $l_{k(j-1)}$, generate $2^{n\hat{R}_k}$ reconstructions $\hat{\mathbf{y}}_{kj}(l_{kj}|w_{kj},l_{k(j-1)})$, $l_{kj}=1,\ldots,2^{n\hat{R}_k}$, according to $\prod_{i=1}^{n}P_{\hat{Y}_k|X_k}(\hat{y}_{(kj)i}|x_{(kj)i}(w_{kj},l_{k(j-1)}))$. This defines the codebooks

$$\begin{aligned}\mathcal{C}_{kj} = \{&\mathbf{x}_{kj}(w_{kj},l_{k(j-1)}),\hat{\mathbf{y}}_{kj}(l_{kj}|w_{kj},l_{k(j-1)}),\\ &w_{kj}=1,\ldots,2^{nR_k},\ l_{k(j-1)}=1,\ldots,2^{n\hat{R}_k},\\ &l_{kj}=1,\ldots,2^{n\hat{R}_k}\}\end{aligned} \tag{18}$$

for $j=1,\ldots,B$ and $k\in\mathcal{K}$.

The codebooks used in the last $K(K-1)$ blocks with $j>B$ are different. The blocks

$$j = B+(k-1)\cdot(K-1)+1,\ldots,B+k\cdot(K-1) \tag{19}$$

are dedicated to flood l_{kB} through the network, and for all nodes $\tilde{k}\in\mathcal{K}$ we generate $2^{n'\hat{R}_k}$ independent and identically distributed (i.i.d.) codewords $\mathbf{x}_{\tilde{k}j}(l_{kB})$, $l_{kB}=1,\ldots,2^{n'\hat{R}_k}$, according to $\prod_{i=1}^{n'}P_{X_{\tilde{k}}}(x_{(\tilde{k}j)i})$. We choose

$$n' = \max_{k}\frac{n\hat{R}_k}{\min\limits_{\tilde{k}\in\mathcal{K}} R_{k\tilde{k}}} \tag{20}$$

that is independent of k and B. The overall rate of user k is thus given by (17) which approaches R_k as $B\to\infty$.

Encoding: Each node k upon receiving $\mathbf{y}_{kj}$ at the end of block j, $j\le B$, tries to find an index l_{kj} such that the following event occurs:

$$\begin{aligned}E_{0(kj)}(l_{kj}) : \big(&\hat{\mathbf{y}}_{kj}(l_{kj}|w_{kj},l_{k(j-1)}),\ \mathbf{x}_{kj}(w_{kj},l_{k(j-1)}),\ \mathbf{y}_{kj}\big)\\ &\in T_\epsilon^n\left(P_{\hat{Y}_kX_kY_k}\right)\end{aligned} \tag{21}$$

If there is no such index l_{kj}, set $l_{kj}=1$. If there is more than one, choose one. Each node k transmits $\mathbf{x}_{kj}(w_{kj},l_{k(j-1)})$ in block $j=1,\ldots,B$.

In the $K-1$ blocks (19), node k conveys l_{kB} reliably to all other nodes by multihopping $\mathbf{x}_{kj}(l_{kB})$ through the network with blocks of length n'.

A. Backward Decoding

Let $\epsilon_1 > \epsilon$. At the end of block $B + K \cdot (K-1)$ every node $k \in \mathcal{K}$ has reliably recovered $\mathbf{l}_B = (l_{1B}, \ldots, l_{KB})$ via the multihopping of the last $K(K-1)$ blocks.

For block $j = B, \ldots, 1$, node k tries to find tuples $\hat{\mathbf{w}}_j^{(k)} = (\hat{w}_{1j}^{(k)}, \ldots, \hat{w}_{Kj}^{(k)})$ and $\hat{\mathbf{l}}_{j-1}^{(k)} = (\hat{l}_{1(j-1)}^{(k)}, \ldots, \hat{l}_{K(j-1)}^{(k)})$ such that the following event occurs:

$$\begin{aligned}
&E_{1(kj)}(\hat{\mathbf{w}}_j^{(k)}, \hat{\mathbf{l}}_{j-1}^{(k)}, \mathbf{l}_j) : \\
&\Big(\mathbf{x}_{1j}(\hat{w}_{1j}^{(k)}, \hat{l}_{1(j-1)}^{(k)}), \ldots, \mathbf{x}_{Kj}(\hat{w}_{Kj}^{(k)}, \hat{l}_{K(j-1)}^{(k)}), \\
&\quad \hat{\mathbf{y}}_{1j}(l_{1j}|\hat{w}_{1j}^{(k)}, \hat{l}_{1(j-1)}^{(k)}), \ldots, \hat{\mathbf{y}}_{Kj}(l_{Kj}|\hat{w}_{Kj}^{(k)}, \hat{l}_{K(j-1)}^{(k)}), \mathbf{y}_{kj}\Big) \\
&\qquad \in T_{\epsilon_1}^n\left(P_{X_{\mathcal{K}}\hat{Y}_{\mathcal{K}}Y_k}\right)
\end{aligned} \tag{22}$$

where $\mathbf{l}_j = (l_{1j}, \ldots, l_{Kj})$ has already been reliably recovered from the previous block $j+1$.

Error Probability: Let $\mathbf{1} = (1, \ldots, 1)$ and assume without loss of generality that $\mathbf{w}_j = \mathbf{1}$ and $\mathbf{l}_{j-1} = \mathbf{1}$. In each block j, the error events at node k are:

$$E_{(kj)0} : \cap_{l_{kj}} E_{0(kj)}^{\mathrm{c}}(l_{kj}) \tag{23}$$

$$E_{(kj)1} : E_{1(kj)}^{\mathrm{c}}(\mathbf{1}, \mathbf{1}, \mathbf{1}) \tag{24}$$

$$E_{(kj)2} : \cup_{(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1},\mathbf{1})} E_{1(kj)}(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{1}) \tag{25}$$

The error event $E_{kj} = \cup_{i=0}^{2} E_{(kj)i}$ at node k in block j thus satisfies

$$\Pr\big[E_{kj}\big] \leq \sum_{i=0}^{2} \Pr\big[E_{(kj)i}\big] \tag{26}$$

where we have used the union bound. $\Pr\big[E_{(kj)0}\big]$ can be made small with large n, as long as (see [12])

$$\hat{R}_k > I(\hat{Y}_k; Y_k|X_k) + \delta_\epsilon(n) \tag{27}$$

where $\delta_\epsilon(n) \to 0$ as $n \to 0$. Similarly, $\Pr\big[E_{(kj)1}\big]$ can be made small with large n.

To bound $\Pr\big[E_{(kj)2}\big]$, for each $\mathbf{w}_j$ and $\mathbf{l}_{j-1}$ we define

$$\mathcal{M}(\mathbf{w}_j) = \{i \in \mathcal{K} : w_{ij} \neq 1\} \tag{28}$$

$$\mathcal{Q}(\mathbf{l}_{j-1}) = \{i \in \mathcal{K} : l_{i(j-1)} \neq 1\} \tag{29}$$

$$\mathcal{S}(\mathbf{w}_j, \mathbf{l}_{j-1}) = \mathcal{M}(\mathbf{w}_j) \cup \mathcal{Q}(\mathbf{l}_{j-1}) \tag{30}$$

and write $\mathcal{S} = \mathcal{S}(\mathbf{w}_j, \mathbf{l}_{j-1})$. The important observations are:

- $(\mathbf{X}_{\mathcal{S}}, \hat{\mathbf{Y}}_{\mathcal{S}})$ is independent of $(\mathbf{X}_{\mathcal{S}^{\mathrm{c}}}, \hat{\mathbf{Y}}_{\mathcal{S}^{\mathrm{c}}}, \mathbf{Y}_{kj})$ in the random coding experiment;
- The $(X_i, \hat{Y}_i)$, $i \in \mathcal{S}$, are mutually independent.

For $k \in \mathcal{S}^{\mathrm{c}}$ and $(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1}, \mathbf{1})$, we thus have

$$\Pr\big[E_{1(kj)}(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{l}_j)\big] \leq 2^{-n(I_{\mathcal{S}} - \delta_{\epsilon_1}(n))} \tag{31}$$

where $\delta_{\epsilon_1}(n) \to 0$ as $n \to 0$ and

$$\begin{aligned}
I_{\mathcal{S}} &= \left[\sum_{i\in\mathcal{S}} H(X_i \hat{Y}_i)\right] + H(X_{\mathcal{S}^{\mathrm{c}}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k) \\
&\qquad - H(X_{\mathcal{S}} \hat{Y}_{\mathcal{S}} X_{\mathcal{S}^{\mathrm{c}}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k) \\
&= I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) \\
&\qquad + \left[\sum_{i\in\mathcal{S}} H(\hat{Y}_i|X_i)\right] - H(\hat{Y}_{\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k).
\end{aligned} \tag{32}$$

By the union bound, we have

$$\begin{aligned}
\Pr\big[E_{(kj)2}\big] &\leq \sum_{(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1},\mathbf{1})} \Pr\big[E_{1(kj)}(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{1})\big] \\
&\overset{(a)}{\leq} \sum_{(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1},\mathbf{1})} 2^{-n(I_{\mathcal{S}(\mathbf{w}_j, \mathbf{l}_{j-1})} - \delta_{\epsilon_1}(n))} \\
&\overset{(b)}{=} \sum_{\substack{\mathcal{S}: k \in \mathcal{S}^{\mathrm{c}} \\ \mathcal{S} \neq \emptyset}} \sum_{\substack{(\mathbf{w}_j, \mathbf{l}_{j-1}): \\ \mathcal{S}(\mathbf{w}_j, \mathbf{l}_{j-1}) = \mathcal{S}}} 2^{-n(I_{\mathcal{S}} - \delta_{\epsilon_1}(n))} \\
&\overset{(c)}{=} \sum_{\substack{\mathcal{S}: k \in \mathcal{S}^{\mathrm{c}} \\ \mathcal{S} \neq \emptyset}} \sum_{\substack{\mathcal{M} \subseteq \mathcal{S}, \mathcal{Q} \subseteq \mathcal{S} \\ \mathcal{M} \cup \mathcal{Q} = \mathcal{S}}} \left(\prod_{i\in\mathcal{M}} (2^{nR_i} - 1) \prod_{i\in\mathcal{Q}} (2^{n\hat{R}_i} - 1)\right) \\
&\qquad \cdot 2^{-n(I_{\mathcal{S}} - \delta_{\epsilon_1}(n))} \\
&< \sum_{\substack{\mathcal{S}: k \in \mathcal{S}^{\mathrm{c}} \\ \mathcal{S} \neq \emptyset}} \sum_{\substack{\mathcal{M} \subseteq \mathcal{S}, \mathcal{Q} \subseteq \mathcal{S} \\ \mathcal{M} \cup \mathcal{Q} = \mathcal{S}}} 2^{nR_{\mathcal{M}}} 2^{n\hat{R}_{\mathcal{Q}}} 2^{-n(I_{\mathcal{S}} - \delta_{\epsilon_1}(n))} \\
&\overset{(d)}{\leq} \sum_{\substack{\mathcal{S}: k \in \mathcal{S}^{\mathrm{c}} \\ \mathcal{S} \neq \emptyset}} 3^{|\mathcal{S}|} 2^{n\left(R_{\mathcal{S}} + \hat{R}_{\mathcal{S}} - (I_{\mathcal{S}} - \delta_{\epsilon_1}(n))\right)} \\
&= \sum_{\substack{\mathcal{S}: k \in \mathcal{S}^{\mathrm{c}} \\ \mathcal{S} \neq \emptyset}} 2^{n\left[R_{\mathcal{S}} - (I_{\mathcal{S}} - \hat{R}_{\mathcal{S}} - \frac{|\mathcal{S}| \log_2 3}{n} - \delta_{\epsilon_1}(n))\right]}
\end{aligned} \tag{33}$$

where

(a) follows from (31)

(b) follows by collecting the $(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1}, \mathbf{1})$ into classes where $\mathcal{S} = \mathcal{S}(\mathbf{w}_j, \mathbf{l}_{j-1})$

(c) follows because there are

$$\prod_{i\in\mathcal{M}} (2^{nR_i} - 1) \prod_{i\in\mathcal{Q}} (2^{n\hat{R}_i} - 1) \tag{34}$$

different $(\mathbf{w}_j, \mathbf{l}_{j-1}) \neq (\mathbf{1}, \mathbf{1})$ that result in the same $\mathcal{M}$ and $\mathcal{Q}$ such that $\mathcal{M} \subseteq \mathcal{S}$, $\mathcal{Q} \subseteq \mathcal{S}$ and $\mathcal{S} = \mathcal{M} \cup \mathcal{Q}$

(d) is because for every node $i \in \mathcal{S}$, we must have one of the following three cases occur:

1) $i \in \mathcal{M}$ and $i \notin \mathcal{Q}$
2) $i \notin \mathcal{M}$ and $i \in \mathcal{Q}$
3) $i \in \mathcal{M}$ and $i \in \mathcal{Q}$

so there are $3^{|\mathcal{S}|}$ different ways of choosing $\mathcal{M}$ and $\mathcal{Q}$.

Since we require $\hat{R}_k \geq I(\hat{Y}_k; Y_k|X_k) + \delta_\epsilon(n)$, we have

$$\begin{aligned}
I_{\mathcal{S}} - \hat{R}_{\mathcal{S}} &\leq I_{\mathcal{S}} - \sum_{i\in\mathcal{S}} I(\hat{Y}_i; Y_i|X_i) - \delta_\epsilon(n) \\
&= I_{\mathcal{S}}^{\mathcal{K}}(k) - \delta_\epsilon(n).
\end{aligned} \tag{35}$$

Combining (26), (27), (33) and (35) we find that we can make $\Pr\big[E_{kj}\big] \to 0$ as $n \to \infty$ if

$$0 \leq R_{\mathcal{S}} < I_{\mathcal{S}}^{\mathcal{K}}(k) \tag{36}$$

for all subsets $\mathcal{S} \subset \mathcal{K}$ such that $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \neq \emptyset$. Of course, if $I_{\mathcal{S}}^{\mathcal{K}}(k) \leq 0$, then we require that $R_{\mathcal{S}} = 0$.

We can split the bounds in (36) into two classes:

$$\text{Class 1} : \mathcal{S} \cap \widetilde{\mathcal{D}}_k \neq \emptyset \tag{37}$$

$$\text{Class 2} : \mathcal{S} \cap \widetilde{\mathcal{D}}_k = \emptyset \text{ or equivalently } \mathcal{S} \subseteq \widetilde{\mathcal{D}}_k^{\mathrm{c}} \tag{38}$$

NNC requires only the Class 1 bounds. SNNC requires both the Class 1 and Class 2 bounds to guarantee reliable decoding of the quantization indices $\mathbf{l}_{j-1}$ for each backward decoding step. Of course, if all Class 2 bounds are satisfied, then SNNC achieves the same rates as NNC. In this case the decoder recovers the signals from the nodes in $\widetilde{\mathcal{D}}_k^{\mathrm{c}}$ and thereby removes interference from these nodes.

Now suppose that an $\mathcal{S}$ in Class 2 has $R_{\mathcal{S}} \geq I_{\mathcal{S}}^{\mathcal{K}}(k)$. We use the argument presented in [7]: for any $\mathcal{J}$ satisfying $\mathcal{S} \subset \mathcal{J} \subset \mathcal{K}$ such that $\mathcal{J} \cap \widetilde{\mathcal{D}}_k \neq \emptyset$ and $k \in \mathcal{J}^{\mathrm{c}}$ we have

$$
\begin{aligned}
& R_{\mathcal{J}\setminus\mathcal{S}} < I_{\mathcal{J}}^{\mathcal{K}}(k) - R_{\mathcal{S}} \\
& \overset{(a)}{\leq} I_{\mathcal{J}}^{\mathcal{K}}(k) - I_{\mathcal{S}}^{\mathcal{K}}(k) \\
& \overset{(b)}{=} I(X_{\mathcal{J}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(\hat{Y}_{\mathcal{J}}; Y_{\mathcal{J}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \quad - I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) + I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k) \\
& \overset{(c)}{=} I(X_{\mathcal{J}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) \\
& \quad - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; Y_{\mathcal{S}} Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \quad - I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k) + I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k) \\
& \overset{(d)}{=} I(X_{\mathcal{J}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) \\
& \quad - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; Y_{\mathcal{S}} Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \overset{(e)}{=} I(X_{\mathcal{J}\setminus\mathcal{S}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) + I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) \\
& \quad - I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k | X_{\mathcal{S}^{\mathrm{c}}}) - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \overset{(f)}{=} I(X_{\mathcal{J}\setminus\mathcal{S}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(X_{\mathcal{S}}; \hat{Y}_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{S}^{\mathrm{c}}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \quad - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{K}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \overset{(g)}{=} I(X_{\mathcal{J}\setminus\mathcal{S}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; X_{\mathcal{S}} Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{S}^{\mathrm{c}}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \overset{(h)}{=} I(X_{\mathcal{J}\setminus\mathcal{S}}; \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k | X_{\mathcal{J}^{\mathrm{c}}}) - I(\hat{Y}_{\mathcal{J}\setminus\mathcal{S}}; Y_{\mathcal{J}\setminus\mathcal{S}} | X_{\mathcal{S}^{\mathrm{c}}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k) \\
& \overset{(i)}{=} I_{\mathcal{J}\setminus\mathcal{S}}^{\mathcal{K}\setminus\mathcal{S}}(k)
\end{aligned}
\tag{39}
$$

where

(a) follows because $R_{\mathcal{S}} \geq I_{\mathcal{S}}^{\mathcal{K}}(k)$ by assumption
(b) follows from the definition (10)
(c) follows from the chain rule for mutual information
(d) follows from the Markov chain

$$X_{\mathcal{S}^{\mathrm{c}}} Y_{\mathcal{J}\setminus\mathcal{S}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_k - Y_{\mathcal{S}} X_{\mathcal{S}} - \hat{Y}_{\mathcal{S}} \tag{40}$$

(e)-(h) follow from the chain rule for mutual information and the Markov chain

$$X_{\mathcal{K}\setminus\mathcal{J}} X_{\mathcal{S}} Y_{\mathcal{S}} \hat{Y}_{\mathcal{J}^{\mathrm{c}}} Y_k - Y_{\mathcal{J}\setminus\mathcal{S}} X_{\mathcal{J}\setminus\mathcal{S}} - \hat{Y}_{\mathcal{J}\setminus\mathcal{S}} \tag{41}$$

(i) follows from the definition (10).

The rates satisfying (39) are the NNC rates for the nodes in $\mathcal{K} \setminus \mathcal{S}$ while treating the signals from the nodes in $\mathcal{S}$ as noise. This shows that if any of the constraints in Class 2 is violated for NNC or SNNC, then the destination node should treat the signals from the corresponding nodes as noise rather than decoding them.

Now repeat the above argument for the nodes in $\mathcal{K} \setminus \mathcal{S}$, until we reach a set $\widetilde{\mathcal{K}}_k \subset \mathcal{K}$, for which

$$0 \leq R_{\mathcal{S}} < I_{\mathcal{S}}^{\widetilde{\mathcal{K}}_k}(k) \tag{42}$$

for all subsets $\mathcal{S} \subset \widetilde{\mathcal{K}}_k$ such that $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \neq \emptyset$. By the union bound, the error probability for all destinations tends to zero as $n \to \infty$ if the rate tuple $(R_1, \ldots, R_K)$ satisfies (42) for all subsets $\mathcal{S} \subset \widetilde{\mathcal{K}}_k$ with $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \cap \widetilde{\mathcal{D}}_k \neq \emptyset$, where $\mathcal{S}^{\mathrm{c}}$ is the complement of $\mathcal{S}$ in $\widetilde{\mathcal{K}}_k$, and for joint distributions that factor as

$$\left[\prod_{k=1}^{K} P(x_k) P(\hat{y}_k | y_k, x_k)\right] P(y^K | x^K). \tag{43}$$

Adding a time-sharing random variable T completes the proof of Theorem 1 for $\mathcal{K}_k = \mathcal{K}$ for all k. The proof with general $\mathcal{K}_k$ follows by having each node k treat the signals of nodes in $\mathcal{K} \setminus \mathcal{K}_k$ as noise.

IV. DISCUSSION

A. Backward Decoding and Sliding Window Decoding

SNNC with *backward decoding* was first studied in [8] for relay networks with one source-destination pair (unicast) and multiple relays. For these networks, [8] showed that NNC and SNNC achieve the same rates. Further, for a fixed random coding distribution there is a subset of the relay nodes whose messages should be decoded to achieve the best NNC and SNNC rates. Several other interesting properties of the coding scheme were derived.

The paper [6] showed that SNNC with *sliding window decoding* achieves the NNC rates for (single) relay channels and pointed out SNNC's advantage of enabling DF. In [7], a simplified proof of the equivalence of the NNC and SNNC rates for the unicast networks considered in [8] was provided. We used this proof in (39) to extend the results of [8] to general memoryless networks with multiple multicast sessions with either *backward decoding* or *joint decoding*. We also extend the concept of *optimal decodable set* to multi-source networks, see Sec. IV-F below.

B. Multihopping

We compare how the approaches of Theorem 1 and [8, Theorem 2.5] reliably convey the last quantization indices $\mathbf{l}_B$. Theorem 1 uses multihopping while Theorem 2.5 in [8] uses a QF-style method with M extra blocks after block B with the same block length n. In these M blocks every node transmits as before except that the messages are set to a default value. Both B and M must go to infinity to reliably decode $\mathbf{l}_B$ [8, Sec. IV. A, Equ. (34)]. The true rate of node k's message w_k is

$$R'_{k,\text{true}} = \frac{nBR_k}{nB + nM} = \frac{B}{B+M} \cdot R_k \tag{44}$$

and we choose $B \gg M$ so that $R'_{k,\text{true}} \to R_k$ as $B \to \infty$. We remark that multihopping may be a better choice for reliably communicating $\mathbf{l}_B$, because the QF-style approach has a large decoding delay due to the large value of M.

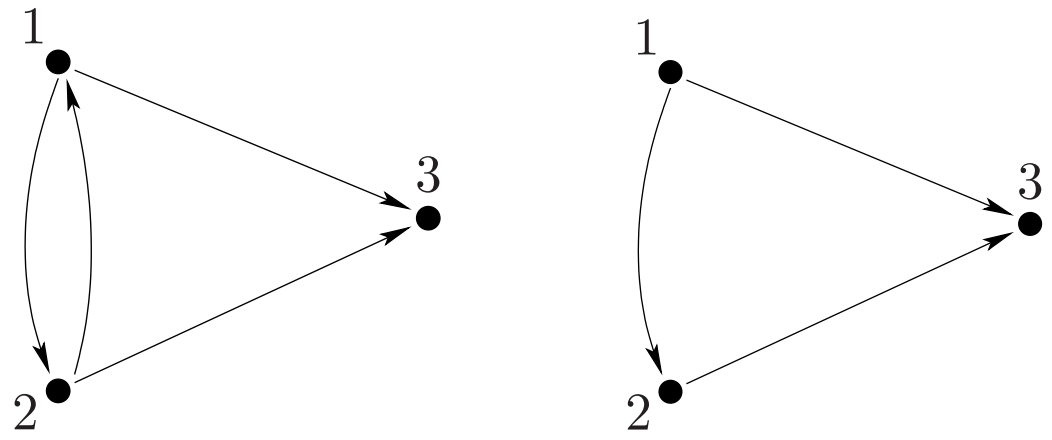

(a) Both nodes 1 and 2 are sources and relays

(b) Node 2 acts as a relay for node 1

Fig. 3. Examples of a three-node network with different rate pairs.



Fig. 4. Illustration of the achievable rates for the network of Fig. 3(b).

C. Choice of Typicality Test

Theorem 1 has a subtle addition to [7] and difference to [1, Theorem 2] and [15, Theorem 18.5], namely that in (42) each $k \in \mathcal{K}$ may have a *different* set $\widetilde{\mathcal{K}}_k$ of nodes satisfying all Class 2 constraints whose messages and quantization indices are included in the typicality test. But we can achieve the rates in (42) at node k with SNNC by using backward decoding and treating the signals from the nodes in $\mathcal{K} \setminus \widetilde{\mathcal{K}}_k$ as noise. Hence we may ignore the Class 2 constraints in (38) when determining the *best* SNNC rates.

The following example suggests that it may not be surprising that the SNNC and NNC rate regions are the same. Consider the network in Fig. 3, where $\mathcal{K} = \{1, 2, 3\}$. Suppose both nodes 1 and 2 act as sources as well as relays for each other in transmitting information to node 3 (see Fig. 3(a)). Referring to Theorem 1, the SNNC and NNC bounds are (see Fig. 4):

$$R_1 < I(X_1; \hat{Y}_2 Y_3 | X_2) - I(\hat{Y}_1; Y_1 | X_1 X_2 \hat{Y}_2 Y_3) \quad (45)$$

$$R_2 < I(X_2; \hat{Y}_1 Y_3 | X_1) - I(\hat{Y}_2; Y_2 | X_1 X_2 \hat{Y}_1 Y_3) \quad (46)$$

$$R_1 + R_2 < I(X_1 X_2; Y_3) - I(\hat{Y}_1 \hat{Y}_2; Y_1 Y_2 | X_1 X_2 Y_3) \quad (47)$$

However, suppose now that node 2 has no message ($R_2 = 0$) and acts as a relay node only (see Fig. 3(b)). Then NNC does not have the bound (46) while SNNC has the bound (46) with $R_2 = 0$ and $\hat{Y}_1 = \emptyset$. We ask whether (46) reduces the SNNC rate. This is equivalent to asking whether SNNC achieves point 1 in Fig. 4. It would be strange if there was a discontinuity in the achievable rate region at $R_2 = 0$.

D. Joint Decoding

It turns out that SNNC with joint decoding achieves the same rates as in Theorem 1. Recently, the authors of [16] showed that SNNC with joint decoding fails to achieve the NNC rates for a *specific* choice of SNNC protocol. However, by multihopping the last quantization indices and then performing joint decoding with the messages and remaining quantization bits, SNNC with joint decoding performs as well as SNNC with backward decoding, and as well as NNC. This makes sense, since joint decoding should perform at least as well as backward decoding. Details are given in Appendix A.

E. Decoding Subsets of Messages

From Theorem 1 we know that if node k decodes messages from nodes in $\mathcal{K}_k$ and some of the Class 2 constraints in (38) are violated, then we should treat the signals from the corresponding nodes as noise. In this way, we eventually wind up with some $\widetilde{\mathcal{K}}_k = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k$, $\mathcal{T}_k \subseteq \widetilde{\mathcal{D}}_k^{\mathrm{c}} \setminus \{k\}$, where all Class 2 constraints are satisfied, i.e., we have

$$0 \le R_{\mathcal{S}} < I_{\mathcal{S}}^{\widetilde{\mathcal{K}}_k}(k|T), \text{ for all } \mathcal{S} \subseteq \mathcal{T}_k,\ \mathcal{S} \neq \emptyset \quad (48)$$

and we achieve as good or better rates. In this sense, the sets $\widetilde{\mathcal{K}}_k$ are important even for NNC. These sets seem difficult to find in large networks because many constraints need to be checked. However, provided that the sets $\widetilde{\mathcal{K}}_k$ are known, we have the following lemma.

Lemma 1: For the K-node DMN, the rate tuples $(R_1, \ldots, R_K)$ are achievable if

$$R_{\mathcal{S}} < I_{\mathcal{S}}^{\widetilde{\mathcal{K}}_k}(k|T)$$

for all $k \in \mathcal{K}$, all subsets $\mathcal{S} \subset \widetilde{\mathcal{K}}_k$ with $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \cap \widetilde{\mathcal{D}}_k \neq \emptyset$, $\widetilde{\mathcal{K}}_k = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k$, $\mathcal{T}_k \subseteq \widetilde{\mathcal{D}}_k^{\mathrm{c}} \setminus \{k\}$, where $\mathcal{T}_k$ satisfies (48) and for any joint distribution that factors as (13).

Proof: The proof follows by including the messages from nodes in $\widetilde{\mathcal{K}}_k$ satisfying (48) in the typicality test at every destination k in Theorem 1. ■

F. Optimal Decodable Sets

SNNC was studied for relay networks in [8]. For such networks there is one message at node 1 that is destined for node K. We thus have $\widetilde{\mathcal{D}}_K = \{1\}$ and $\widetilde{\mathcal{D}}_K^{\mathrm{c}} \setminus \{K\} = \{2, \ldots, K-1\}$. The authors of [8] showed that for a given random coding distribution

$$P(t)P(x_1|t) \prod_{k \in \widetilde{\mathcal{D}}_K^{\mathrm{c}}} P(x_k|t)P(\hat{y}_k|y_k, x_k, t) \quad (49)$$

there exists a *unique largest optimal decodable set* $\mathcal{T}^*$, $\mathcal{T}^* \subseteq \widetilde{\mathcal{D}}_K^{\mathrm{c}} \setminus \{K\}$, of the relay nodes that provides the same best achievable rates for both SNNC and NNC [8, Theorem 2.8]. We now show that the concept of *optimal decodable set* extends naturally to *multi-source networks*.

Lemma 2: For a K-node memoryless network with a fixed random coding distribution

$$P(t) \prod_{k=1}^{K} P(x_k|t)P(\hat{y}_k|y_k, x_k, t) \quad (50)$$

there exists for each node k a *unique largest* set $\mathcal{T}_k^*$ among all subsets $\mathcal{T}_k \subseteq \widetilde{\mathcal{D}}_k^{\mathrm{c}} \setminus \{k\}$ satisfying (48). The messages of the nodes in $\mathcal{T}_k^*$ should be included in the typicality test to provide the best achievable rates.

Proof: We prove Lemma 2 without a time-sharing random variable T. The proof with T is similar. We show that $\mathcal{T}_k^*$ is unique by showing that the union of any two sets $\mathcal{T}_k^1$ and $\mathcal{T}_k^2$ satisfying all constraints also satisfies all constraints and provides as good or better rates. Continuing taking the union, we eventually reach a unique largest set $\mathcal{T}_k^*$ that satisfies all constraints and gives the best rates.

Partition the subsets $\mathcal{T}_k \subseteq \widetilde{\mathcal{D}}_k^{\mathrm{c}} \setminus \{k\}$ into two classes:

Class 1: $R_{\mathcal{S}} < I_{\mathcal{S}}^{\mathcal{K}_k}(k)$ for all $\mathcal{S} \subseteq \mathcal{T}_k$;

Class 2: There exists one $\mathcal{S} \subseteq \mathcal{T}_k$ such that $R_{\mathcal{S}} \geq I_{\mathcal{S}}^{\mathcal{K}_k}(k)$.

We may ignore the $\mathcal{T}_k$ in Class 2 because the proof of Theorem 1 shows that we can treat the signals of nodes associated with violated constraints as noise and achieve as good or better rates. Hence, we focus on $\mathcal{T}_k$ in Class 1.

Suppose $\mathcal{T}_k^1$ and $\mathcal{T}_k^2$ are in Class 1 and let $\mathcal{T}_k^3 = \mathcal{T}_k^1 \cup \mathcal{T}_k^2$. We define

$$\widetilde{\mathcal{K}}_k^1 = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k^1 \tag{51}$$

$$\widetilde{\mathcal{K}}_k^2 = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k^2 \tag{52}$$

$$\widetilde{\mathcal{K}}_k^3 = \{k\} \cup \widetilde{\mathcal{D}}_k \cup \mathcal{T}_k^3. \tag{53}$$

Further, for every $\mathcal{S} \subseteq \widetilde{\mathcal{K}}_k^3$, define $\mathcal{S}_1 = \mathcal{S} \cap \widetilde{\mathcal{K}}_k^1$ and $\mathcal{S}_2 = \mathcal{S} \cap (\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_1)$. We have $\mathcal{S}_1 \subseteq \widetilde{\mathcal{K}}_k^1$, $\mathcal{S}_2 \subseteq \widetilde{\mathcal{K}}_k^2$, $\mathcal{S}_1 \cup \mathcal{S}_2 = \mathcal{S}$ and $\mathcal{S}_1 \cap \mathcal{S}_2 = \emptyset$. We further have

$$\begin{aligned}
R_{\mathcal{S}} &\overset{(a)}{=} R_{\mathcal{S}_1} + R_{\mathcal{S}_2} \\
&\overset{(b)}{<} I_{\mathcal{S}_1}^{\widetilde{\mathcal{K}}_k^1}(k) + I_{\mathcal{S}_2}^{\widetilde{\mathcal{K}}_k^2}(k) \\
&\overset{(c)}{=} I(X_{\mathcal{S}_1}; \hat{Y}_{\widetilde{\mathcal{K}}_k^1 \setminus \mathcal{S}_1} Y_k | X_{\widetilde{\mathcal{K}}_k^1 \setminus \mathcal{S}_1}) - I(\hat{Y}_{\mathcal{S}_1}; Y_{\mathcal{S}_1} | X_{\widetilde{\mathcal{K}}_k^1} \hat{Y}_{\widetilde{\mathcal{K}}_k^1 \setminus \mathcal{S}_1} Y_k) \\
&\quad + I(X_{\mathcal{S}_2}; \hat{Y}_{\widetilde{\mathcal{K}}_k^2 \setminus \mathcal{S}_2} Y_k | X_{\widetilde{\mathcal{K}}_k^2 \setminus \mathcal{S}_2}) - I(\hat{Y}_{\mathcal{S}_2}; Y_{\mathcal{S}_2} | X_{\widetilde{\mathcal{K}}_k^2} \hat{Y}_{\widetilde{\mathcal{K}}_k^2 \setminus \mathcal{S}_2} Y_k) \\
&\overset{(d)}{\leq} I(X_{\mathcal{S}_1}; \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k | X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}}) - I(\hat{Y}_{\mathcal{S}_1}; Y_{\mathcal{S}_1} | X_{\widetilde{\mathcal{K}}_k^1} \hat{Y}_{\widetilde{\mathcal{K}}_k^1 \setminus \mathcal{S}_1} Y_k) \\
&\quad + I(X_{\mathcal{S}_2}; \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k | X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_2}) - I(\hat{Y}_{\mathcal{S}_2}; Y_{\mathcal{S}_2} | X_{\widetilde{\mathcal{K}}_k^2} \hat{Y}_{\widetilde{\mathcal{K}}_k^2 \setminus \mathcal{S}_2} Y_k) \\
&\overset{(e)}{\leq} I(X_{\mathcal{S}_1}; \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k | X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}}) - I(\hat{Y}_{\mathcal{S}_1}; Y_{\mathcal{S}_1} | X_{\widetilde{\mathcal{K}}_k^3} \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k) \\
&\quad + I(X_{\mathcal{S}_2}; \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k | X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_2}) - I(\hat{Y}_{\mathcal{S}_2}; Y_{\mathcal{S}_2} | X_{\widetilde{\mathcal{K}}_k^3} \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_2} Y_k) \\
&\overset{(f)}{=} I(X_{\mathcal{S}}; \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k | X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}}) - I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_{\widetilde{\mathcal{K}}_k^3} \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k) \\
&\overset{(g)}{=} I_{\mathcal{S}}^{\widetilde{\mathcal{K}}_k^3}(k)
\end{aligned} \tag{54}$$

where

(a) follows from the definition of $\mathcal{S}_1$ and $\mathcal{S}_2$
(b) follows because both $\mathcal{T}_k^1$ and $\mathcal{T}_k^2$ are in Class 1
(c) follows from the definition (10)
(d) follows because all X_k are independent and conditioning does not increase entropy
(e) follows because conditioning does not increase entropy and by the Markov chains

$$X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_2} \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_2} Y_k - Y_{\mathcal{S}_2} X_{\mathcal{S}_2} - \hat{Y}_{\mathcal{S}_2} \tag{55}$$

$$X_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}_1} \hat{Y}_{\widetilde{\mathcal{K}}_k^3 \setminus \mathcal{S}} Y_k - Y_{\mathcal{S}_1} X_{\mathcal{S}_1} - \hat{Y}_{\mathcal{S}_1} \tag{56}$$

(f) follows from the chain rule for mutual information and the Markov chains (55) and (56)
(g) follows from the definition (10).

The bound (54) shows that $\mathcal{T}_k^3$ is also in Class 1. Moreover, by (54) if k includes the messages of nodes in $\widetilde{\mathcal{K}}_k^3$ in the typicality test, then the rates are as good or better than those achieved by including the messages of nodes in $\widetilde{\mathcal{K}}_k^1$ or $\widetilde{\mathcal{K}}_k^2$ in the typicality test. Taking the union of all $\mathcal{T}_k$ in Class 1, we obtain the *unique largest* set $\mathcal{T}_k^*$ that gives the best achievable rates. ■

Remark 2: There are currently no efficient algorithms for finding an optimal decodable set. Such algorithms would be useful for applications with time-varying channels.

V. SNNC WITH A DF OPTION

One of the main advantages of SNNC is that the relays can switch between QF (or CF) and DF depending on the channel conditions. If the channel conditions happen to be good, then the natural choice is DF which removes the noise at the relays. This not possible with NNC due to the high rate of the long message. On the other hand, if a relay happens to experience a deep fade, then this relay should use QF (or CF).

In the following, we show how mixed strategies called SNNC-DF work for the multiple-relay channel. These mixed strategies are similar to those in [9, Theorem 4]. However, in [9] the relays use CF with a prescribed binning rate to enable *step-by-step* decoding (CF-S) instead of QF. In Section VI we give numerical examples to show that SNNC-DF can outperform DF, CF-S and NNC.

As in [9], we partition the relays $\mathcal{T} = \{2, \ldots, K-1\}$ into two sets

$$\mathcal{T}_1 = \{k : \; 2 \leq k \leq K_1\}$$
$$\mathcal{T}_2 = \mathcal{T} \setminus \mathcal{T}_1$$

where $1 \leq K_1 \leq K-1$. The relays in $\mathcal{T}_1$ use DF while the relays in $\mathcal{T}_2$ use QF. Let $\pi(\cdot)$ be a permutation on $\{1, \ldots, K\}$ with $\pi(1) = 1$ and $\pi(K) = K$ and let $\pi(j:k) = \{\pi(j), \pi(j+1), \ldots, \pi(k)\}$, $1 \leq j \leq k \leq K$. Define $\mathcal{T}_{i(\pi)} = \{\pi(k), k \in \mathcal{T}_i\}$, $i = 1, 2$. We have the following theorem.

Theorem 2: SNNC-DF achieves the rates satisfying

$$\begin{aligned}
&R_{\text{SNNC-DF}} < \max_{\pi(\cdot)} \max_{K_1} \min \\
&\Big\{ \min_{1 \leq k \leq K_1 - 1} I\left(X_{\pi(1:k)}; Y_{\pi(k+1)} | X_{\pi(k+1:K_1)}\right), \\
&I(X_1 X_{\mathcal{T}_{1(\pi)}} X_{\mathcal{S}}; \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_K | X_{\mathcal{S}^{\mathrm{c}}}) - I(\hat{Y}_{\mathcal{S}}; Y_{\mathcal{S}} | X_1 X_{\mathcal{T}} \hat{Y}_{\mathcal{S}^{\mathrm{c}}} Y_K) \Big\}
\end{aligned} \tag{57}$$

for all $\mathcal{S} \subseteq \mathcal{T}_{2(\pi)}$, where $\mathcal{S}^{\mathrm{c}}$ is the complement of $\mathcal{S}$ in $\mathcal{T}_{2(\pi)}$, and where the joint distribution factors as

$$\begin{aligned}
P(x_1 x_{\mathcal{T}_{1(\pi)}}) \cdot \Big[\prod_{k \in \mathcal{T}_{2(\pi)}} P(x_k) P(\hat{y}_k | y_k, x_k) \Big] \\
\cdot P(y_2, \ldots, y_K | x_1, \ldots, x_{K-1}).
\end{aligned} \tag{58}$$

Remark 3: As usual, we may add a time-sharing random variable to improve rates.

Proof Sketch: For a given permutation $\pi(\cdot)$ and K_1, the first mutual information term in (57) describes the DF bounds [9, Theorem 1] (see also [17, Theorem 3.1]). The second mutual information term in (57) describes the SNNC bounds.

Block	1	2	$\cdots$	B	$B+1$	$B+2\cdots B+4$
X_1	$\mathbf{x}_{11}(w_1,1)$	$\mathbf{x}_{12}(w_2,w_1)$	$\cdots$	$\mathbf{x}_{1B}(w_B,w_{B-1})$	$\mathbf{x}_{1(B+1)}(1,w_B)$	
X_2	$\mathbf{x}_{21}(1)$	$\mathbf{x}_{22}(w_1)$	$\cdots$	$\mathbf{x}_{2B}(w_{(B-1)})$	$\mathbf{x}_{2(B+1)}(w_B)$	Multihop l_{B+1} to node 4 in $3n'$ channel uses
X_3	$\mathbf{x}_{31}(1)$	$\mathbf{x}_{32}(l_1)$	$\cdots$	$\mathbf{x}_{3B}(l_{B-1})$	$\mathbf{x}_{3(B+1)}(l_B)$	
$\hat{Y}_3$	$\hat{\mathbf{y}}_{31}(l_1\|1)$	$\hat{\mathbf{y}}_{32}(l_2\|l_1)$	$\cdots$	$\hat{\mathbf{y}}_{3B}(l_B\|l_{B-1})$	$\hat{\mathbf{y}}_{3(B+1)}(l_{B+1}\|l_B)$	

TABLE II

CODING SCHEME FOR THE TWO-RELAY CHANNEL WITH BLOCK MARKOV CODING FOR $\mathbf{x}_{1j}(\cdot)$ AND $\mathbf{x}_{2j}(\cdot)$.

Using a similar analysis as for Theorem 1 and by treating $(X_1X_{\mathcal{T}_{1(\pi)}})$ as the "new" source signal at the destination, we have the SNNC bounds

$$\begin{aligned} R_{\text{SNNC-DF}} &< I(X_1X_{\mathcal{T}_{1(\pi)}}X_{\mathcal{S}};\hat{Y}_{\mathcal{S}^c}Y_K|X_{\mathcal{S}^c}) \\ &\quad - I(\hat{Y}_{\mathcal{S}};Y_{\mathcal{S}}|X_1X_{\mathcal{T}}\hat{Y}_{\mathcal{S}^c}Y_K) \qquad (59) \\ 0 &\le I(X_{\mathcal{S}};\hat{Y}_{\mathcal{S}^c}Y_K|X_1X_{\mathcal{T}_{1(\pi)}}X_{\mathcal{S}^c}) \\ &\quad - I(\hat{Y}_{\mathcal{S}};Y_{\mathcal{S}}|X_1X_{\mathcal{T}}\hat{Y}_{\mathcal{S}^c}Y_K) \qquad (60) \end{aligned}$$

for all $\mathcal{S}\subseteq\mathcal{T}_{2(\pi)}$.

The same argument used to prove Theorem 1 shows that if any of the constraints (60) is violated, then we get rate bounds that can be achieved with SNNC-DF by treating the signals from the corresponding relay nodes as noise. Thus we may ignore the constraints (60). ■

Example 4: Consider $K=4$ and $K_1=2$. There are two possible permutations $\pi_1(1:4)=\{1,2,3,4\}$ and $\pi_2(1:4)=\{1,3,2,4\}$. For $\pi_1(1:4)=\{1,2,3,4\}$, Theorem 2 states that SNNC-DF achieves any rate up to

$$\begin{aligned} R_{\text{SNNC-DF}} = \min\Big\{&I(X_1;Y_2|X_2), I(X_1X_2;\hat{Y}_3Y_4|X_3), \\ &I(X_1X_2X_3;Y_4)-I(\hat{Y}_3;Y_3|X_1X_2X_3Y_4)\Big\} \qquad (61) \end{aligned}$$

where the joint distribution factors as

$$P(x_1,x_2)P(x_3)P(\hat{y}_3|y_3,x_3)\cdot P(y_2,y_3,y_4|x_1,x_2,x_3). \qquad (62)$$

The corresponding coding scheme is given in Table II.

If relay node 2 uses DF while relay node 3 uses CF-S, then by [9, Theorem 4] with $U_2=0$, any rate up to

$$R_{\text{[CF-S]-DF}} < \min\Big\{I(X_1;Y_2|X_2), I(X_1X_2;\hat{Y}_3Y_4|X_3)\Big\} \qquad (63)$$

can be achieved, subject to

$$I(\hat{Y}_3;Y_3|X_3Y_4)\le I(X_3;Y_4) \qquad (64)$$

and the joint distribution factors as (62). It turns out that $R_{\text{[CF-S]-DF}}$ in (63)-(64) is the same as $R_{\text{SNNC-DF}}$ (61), since NNC and SNNC do not improve the CF-S rate for one relay [6]. But $R_{\text{SNNC-DF}}$ is better than $R_{\text{[CF-S]-DF}}$ in general.

A. SNNC-DF without Block Markov Coding

The coding for Theorem 2 uses block Markov coding (BMC) which may not be practical for rapidly changing channels. For example, if $K=4$ and node 2 cannot decode due to a deep fade while node 3 can decode because of good channel conditions, source node 1 would need to change its codebook and encoder to cooperate with relay node 3 by selecting a joint distribution $P_{X_1X_3}$ rather than $P_{X_1X_2}$.

We can circumvent this issue by *not* using BMC, i.e., all nodes use the same encoder for all channel states. We show in Appendix B that, without BMC, *backward* decoding achieves rates satisfying

$$\begin{aligned} R_{\text{SNNC-DF}} < \min\Big\{&I(X_1;Y_2|X_2), \\ &I(X_1;Y_4)+I(X_2;\hat{Y}_3Y_4|X_1X_3), \\ &I(X_1X_2X_3;Y_4)-I(\hat{Y}_3;Y_3|X_1X_2X_3Y_4)\Big\} \qquad (65) \end{aligned}$$

while *joint* decoding recovers rates up to (61) but the joint distributions now factors as

$$P(x_1)P(x_2)P(x_3)P(\hat{y}_3|y_3,x_3)P(y_2,y_3,y_4|x_1,x_2,x_3) \qquad (66)$$

rather than in (62) where X_1 and X_2 may be dependent. The rate (65) is in general lower than the rate (61) under (66). This demonstrates that joint decoding can improve performance over backward decoding when BMC is not used.

Remark 4: How to perform DF for multiple sources is not obvious. Consider again the three node network in Fig. 3, but now every node wishes to send a message to the other two nodes. How should one set up cooperation if all nodes may use DF? Such questions are worth addressing, since their answers will give insight on how to incorporate mixed strategies to boost system performance.

VI. GAUSSIAN NETWORKS

We next consider additive white Gaussian noise (AWGN) networks. We use $X\sim\mathcal{CN}(\mu,\sigma^2)$ to denote a circularly symmetric complex Gaussian random variable X with mean μ and variance σ^2. Let $Z^K=Z_1Z_2\ldots Z_K$ be a noise string whose symbols are i.i.d. and $Z_k\sim\mathcal{CN}(0,1)$ for all k. The channel output at node k is

$$Y_k=\left[\sum_{\substack{j=1\\j\neq k}}^{K}G_{jk}X_j\right]+Z_k \qquad (67)$$

where the channel gain is

$$G_{jk}=\frac{H_{jk}}{\sqrt{d_{jk}^{\alpha}}} \qquad (68)$$

and d_{jk} is the distance between nodes j and k, α is a path-loss exponent and H_{jk} is a complex fading random variable.

We consider two kinds of fading:

- No fading: H_{jk} is a constant and known at all nodes. We set $H_{jk}=1$ for all $j,k\in\mathcal{K}$.

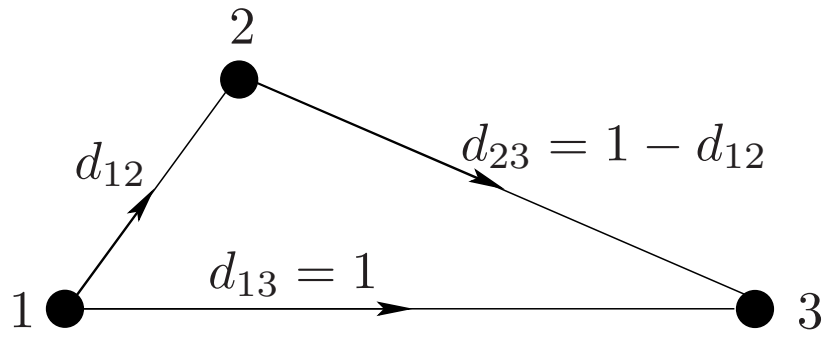

Fig. 5. A relay channel.

- Rayleigh fading: we assume $H_{jk} \sim \mathcal{CN}(0,1)$. We further assume that a destination node k knows G_{jk} for all $j,k \in \mathcal{K}$ and a relay node k knows G_{jk} for all $j \in \mathcal{K}$ and knows the statistics of all other $G_{jl}, j,l \in \mathcal{K}$. We focus on slow fading, i.e., all G_{jk} remain unchanged once chosen.

We avoid issues of power control by imposing a per-symbol power constraint $\mathrm{E}[|X_k|^2] \le P_k$. We choose the inputs to be Gaussian, i.e., $X_k \sim \mathcal{CN}(0,P_k)$, $k \in \mathcal{K}$.

In the following we give numerical examples for four different channels

- the relay channel;
- the two-relay channel;
- the multiple access relay channel (MARC);
- the two-way relay channel (TWRC).

We evaluate the performance for no fading in terms of achievable rates (in bits per channel use) and for Rayleigh fading in terms of outage probability [18] for a target rate R_{tar}.

Relay node k chooses

$$\hat{Y}_k = Y_k + \hat{Z}_k \tag{69}$$

where $\hat{Z}_k \sim \mathcal{CN}(0,\hat{\sigma}_k^2)$. For the no fading case, relay node k numerically calculates the optimal $\hat{\sigma}_k^2$ for CF-S and SNNC, and the optimal binning rate $R_{k(\text{bin})}$ for CF-S, in order to maximize the rates. For DF, the source and relay nodes numerically calculate the power allocation for superposition coding that maximizes the rates. For the Rayleigh fading case, relay node k knows only the G_{jk}, $j \in \mathcal{K}$, but it can calculate the optimal $\hat{\sigma}_k^2$ and $R_{k(\text{bin})}$ based on the statistics of G_{jl}, for all $j,l \in \mathcal{K}$ so as to minimize the outage probability. For DF, the fraction of power that the source and relay nodes allocate for cooperation is calculated numerically based on the statistics of G_{jk}, for all $j,k \in \mathcal{K}$, to minimize the outage probability. Details of the derivations are given in Appendix C.

A. Relay Channels

The Gaussian relay channel (Fig. 5) has

$$Y_2 = G_{12}X_1 + Z_2 \tag{70}$$

$$Y_3 = G_{13}X_1 + G_{23}X_2 + Z_3 \tag{71}$$

and source node 1 has a message destined for node 3.

1) No Fading: Fig. 5 depicts the geometry and Fig. 6 depicts the achievable rates as a function of d_{12} for $P_1 = 4, P_2 = 2$ and $\alpha = 3$. DF achieves rates close to capacity when the relay is close to the source while CF-S dominates as the relay moves towards the destination. For the relay channel, CF-S performs as well as SNNC (NNC). SNNC-DF unifies the advantages of both SNNC and DF and achieves the best rates for all relay positions.

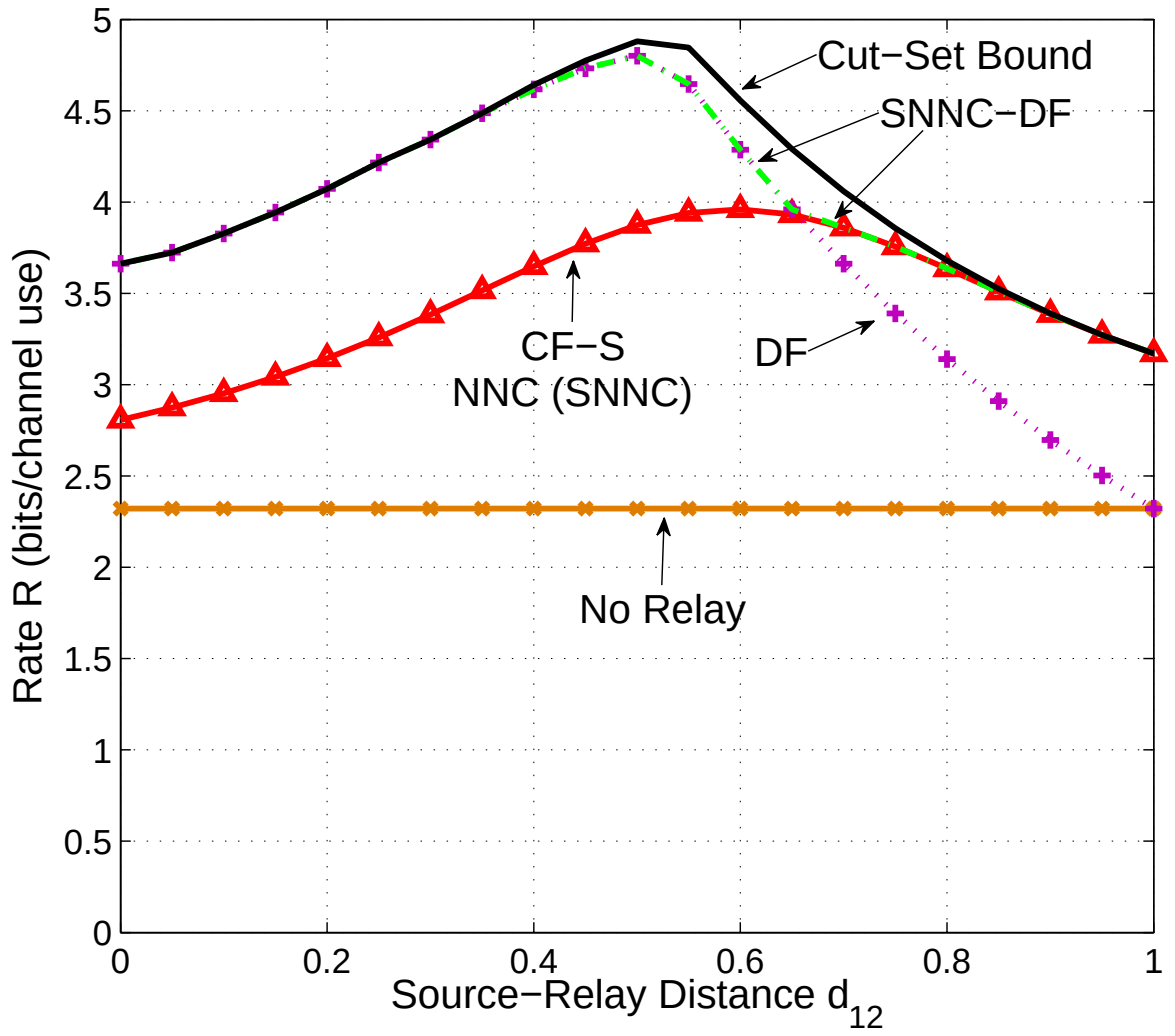

Fig. 6. Achievable rates R (in bits per channel use) for a relay channel with no fading.

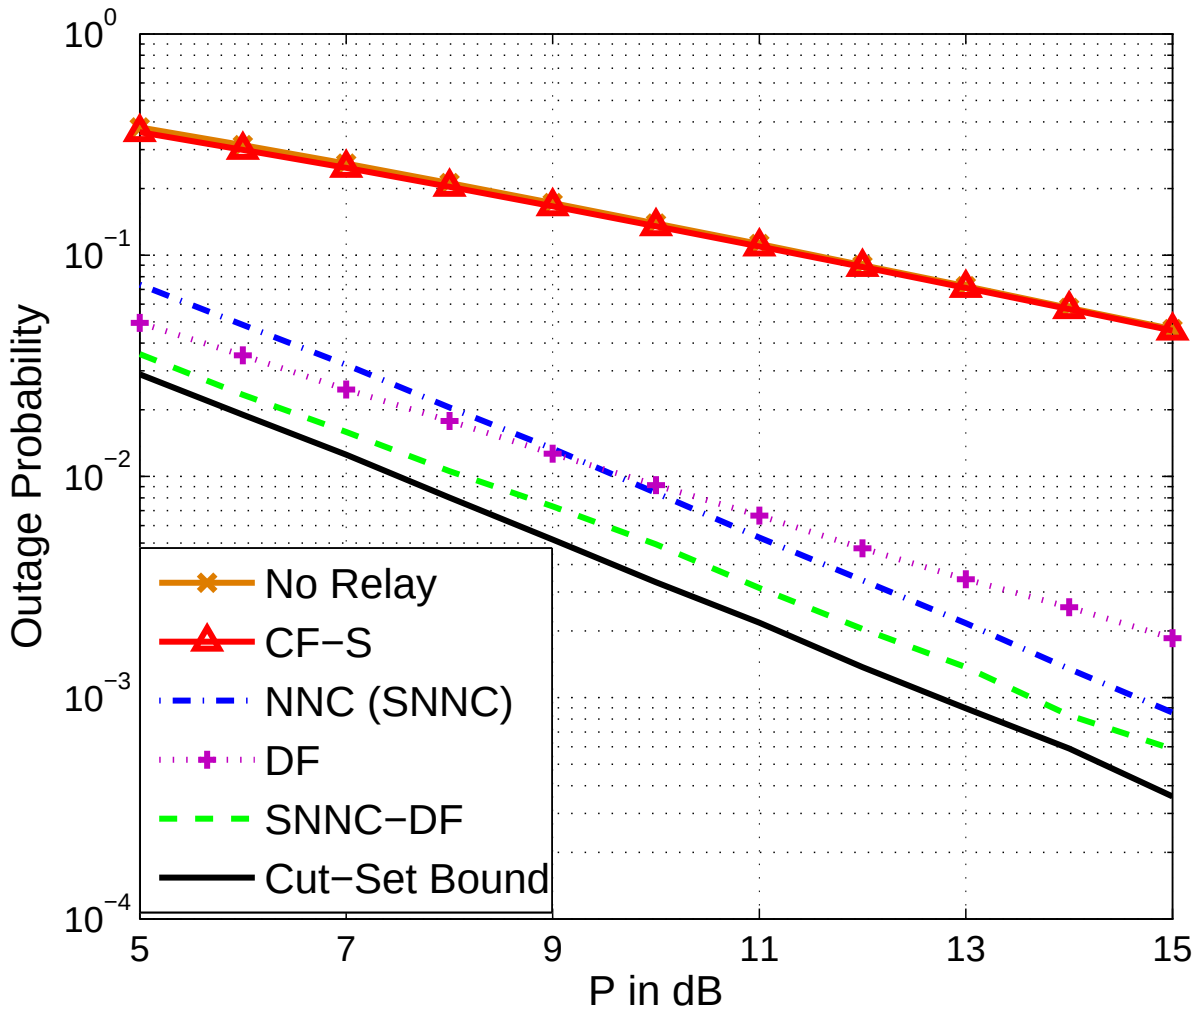

Fig. 7. Outage probabilities for a relay channel with Rayleigh fading.

2) Slow Rayleigh fading: Fig. 7 depicts the outage probabilities with $R_{\text{tar}} = 2$, $P_1 = 2P, P_2 = P$, $d_{12} = 0.3$, $d_{23} = 0.7$, $d_{13} = 1$ and $\alpha = 3$. Over the entire power range CF-S gives the worst outage probability. This is because CF-S requires a reliable relay-destination link so that both the bin and quantization indices can be recovered. Both DF and SNNC improve on CF-S. DF performs better at low power while SNNC is better at high power. SNNC-DF has the relay decode if possible and perform QF otherwise, and gains 1 dB over SNNC and DF.

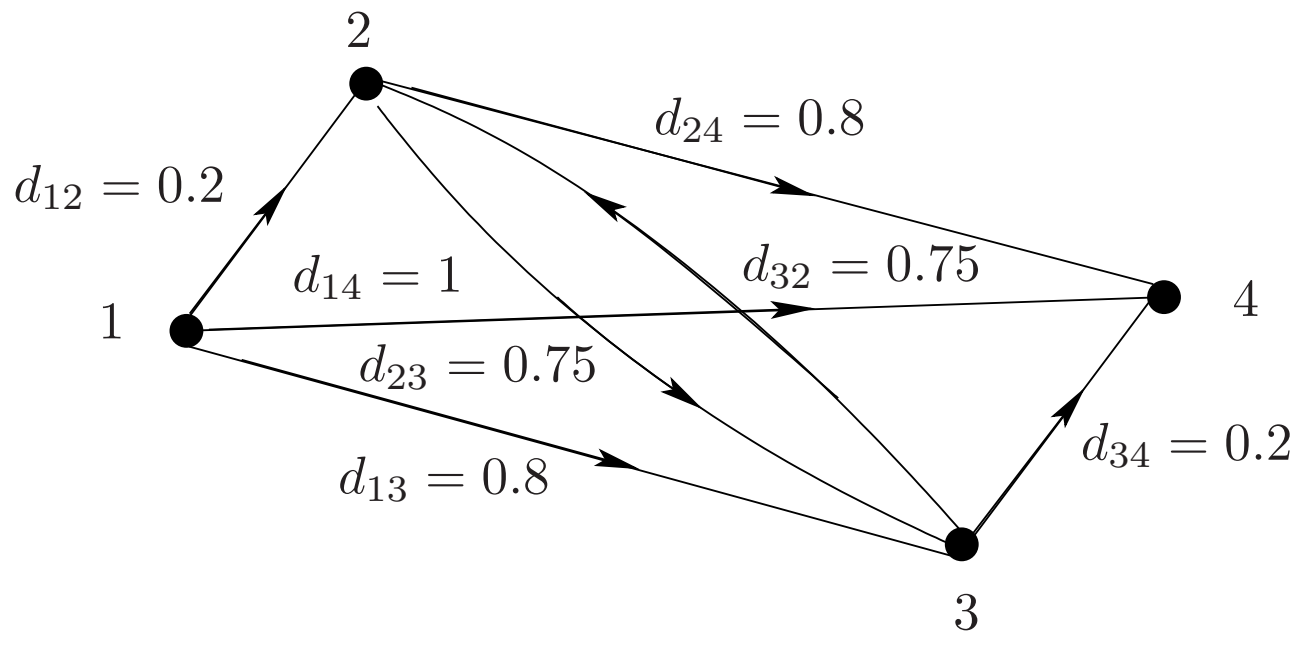

Fig. 8. A two-relay channel.

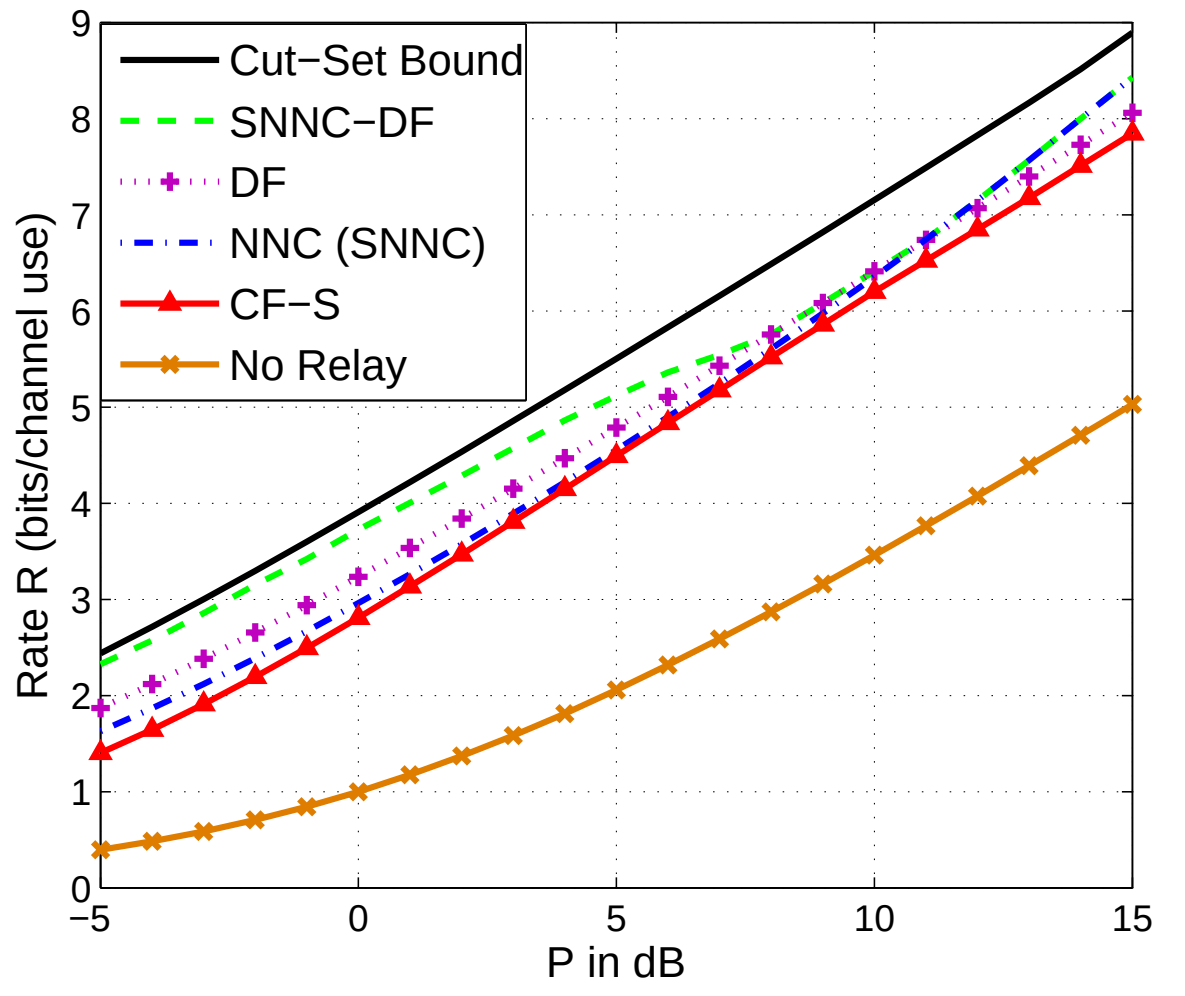

Fig. 9. Achievable rates R (in bits per channel use) for a TRC with no fading.

B. *Two-Relay Channels*

The Gaussian two-relay channel (Fig. 8) has

$$Y_2 = G_{12}X_1 + G_{32}X_3 + Z_2 \tag{72}$$

$$Y_3 = G_{13}X_1 + G_{23}X_2 + Z_3 \tag{73}$$

$$Y_4 = G_{14}X_1 + G_{24}X_2 + G_{34}X_3 + Z_4 \tag{74}$$

where the relay nodes 2 and 3 help node 1 transmit a message to node 4.

1) No Fading: Fig. 8 depicts the geometry and Fig. 9 depicts the achievable rates for $P_1 = P_2 = P_3 = P$ and $\alpha = 3$. The CF-S rates are the lowest over the entire power range. As expected, SNNC improves on CF-S. DF performs better than SNNC at low power but worse at high power. SNNC-DF achieves the best rates and exhibits reasonable rate and power gains over SNNC and DF for $P = -5$ dB to 5 dB. The gains are because in this power range SNNC-DF has relay 2 performing DF and relay 3 performing QF.

2) Slow Rayleigh Fading: Fig. 10 depicts the outage probabilities with $R_{\text{tar}} = 2$, $P_1 = P_2 = P_3 = P$, the geometry of Fig. 8 and $\alpha = 3$. CF-S gives the worst performance over the entire power range. This is because CF-S requires a reliable relay-destination link for *both* relays so that the bin and quantization indices for both relays can be decoded. DF provides better outage probabilities than CF-S but is worse than NNC or SNNC, since it requires reliable decoding at both relays. SNNC-DF has the two relays decode if possible and perform QF otherwise and gains about 1 dB over NNC (SNNC). In general, we expect larger gains of SNNC-DF over NNC for networks with more relays.

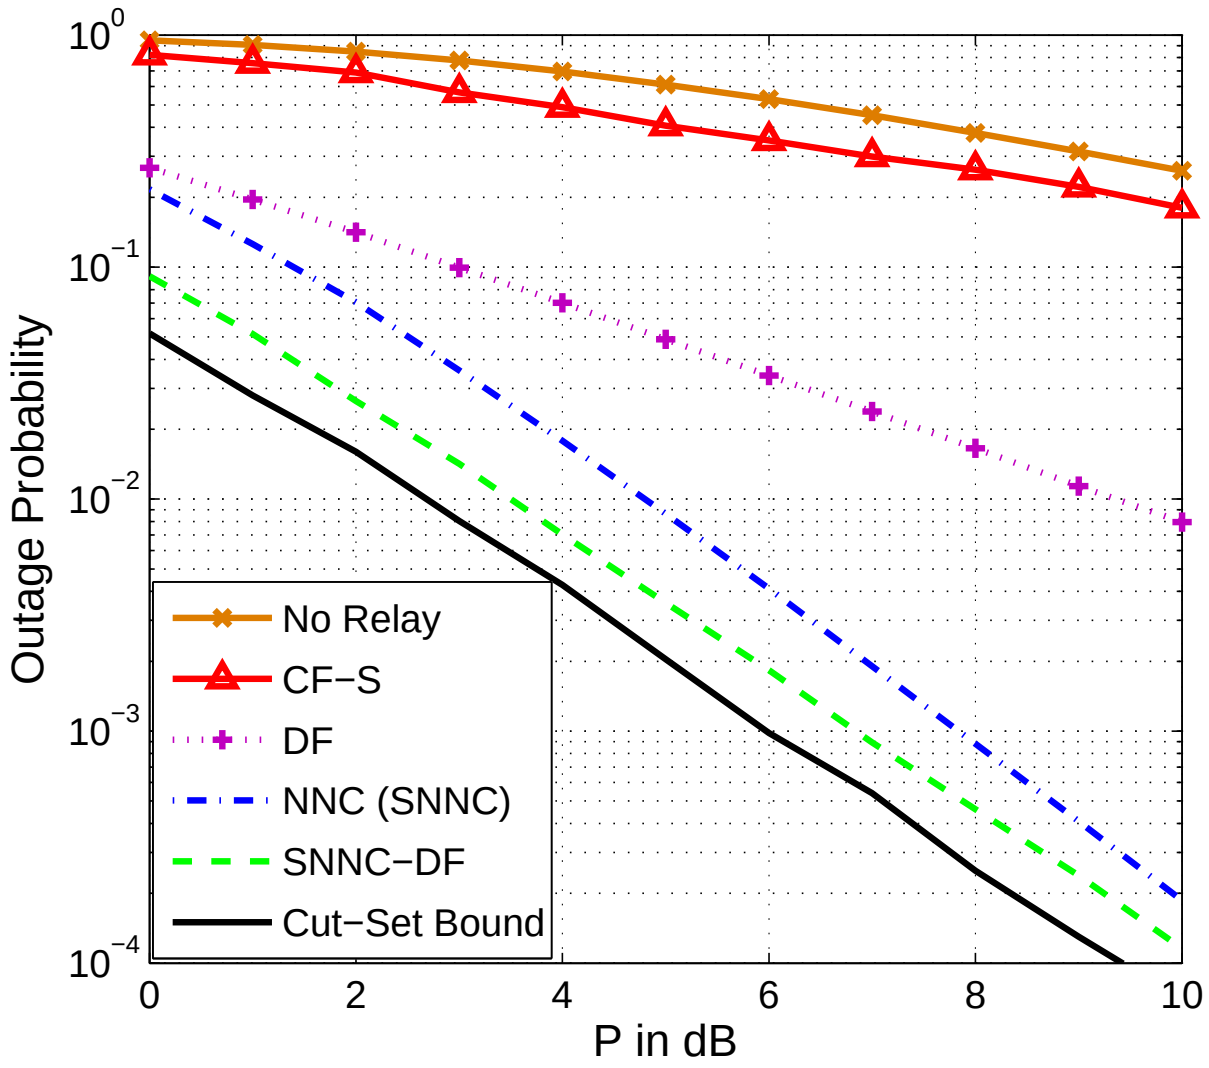

Fig. 10. Outage probabilities for a TRC with Rayleigh fading.

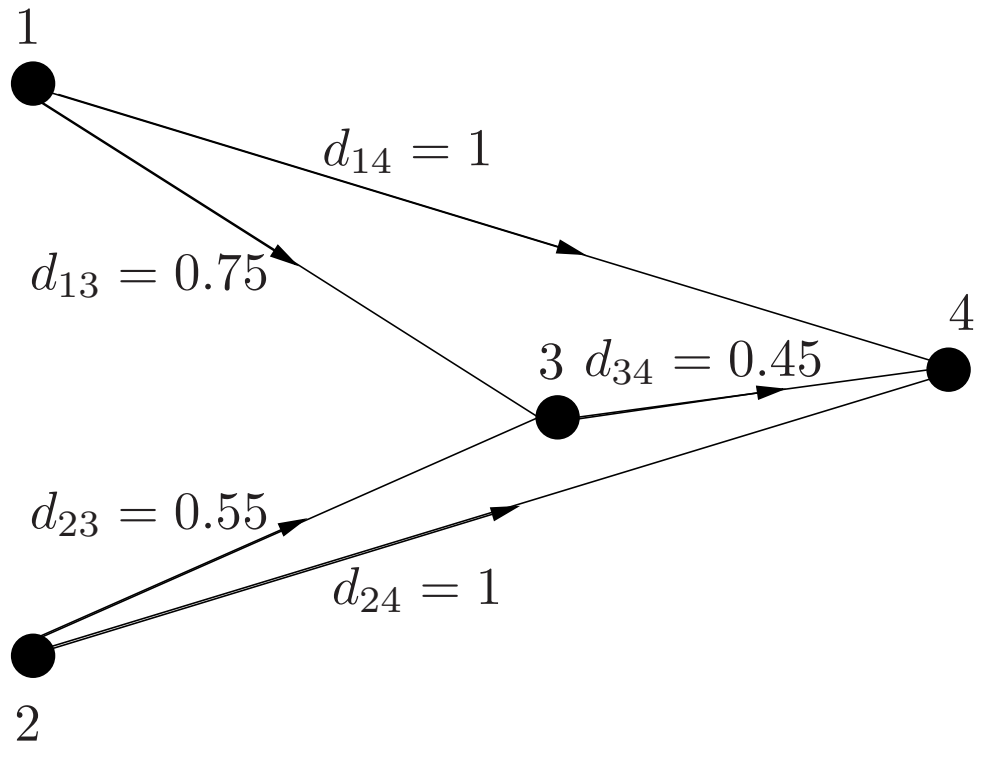

Fig. 11. A MARC.

C. *Multiple Access Relay Channels*

The Gaussian MARC (Fig. 11) has

$$Y_3 = G_{13}X_1 + G_{23}X_2 + Z_3 \tag{75}$$

$$Y_4 = G_{14}X_1 + G_{24}X_2 + G_{34}X_3 + Z_4 \tag{76}$$

and nodes 1 and 2 have messages destined for node 4.

1) No Fading: Fig. 11 depicts the geometry and Fig. 12 depicts the achievable rate regions for $P_1 = P_2 = P_3 = P$, $P = 15$ dB and $\alpha = 3$. The SNNC rate region includes the CF-S rate region. Through time-sharing, the SNNC-DF region is the convex hull of the union of DF and SNNC regions. SNNC-DF again improves on NNC (or SNNC) and DF.

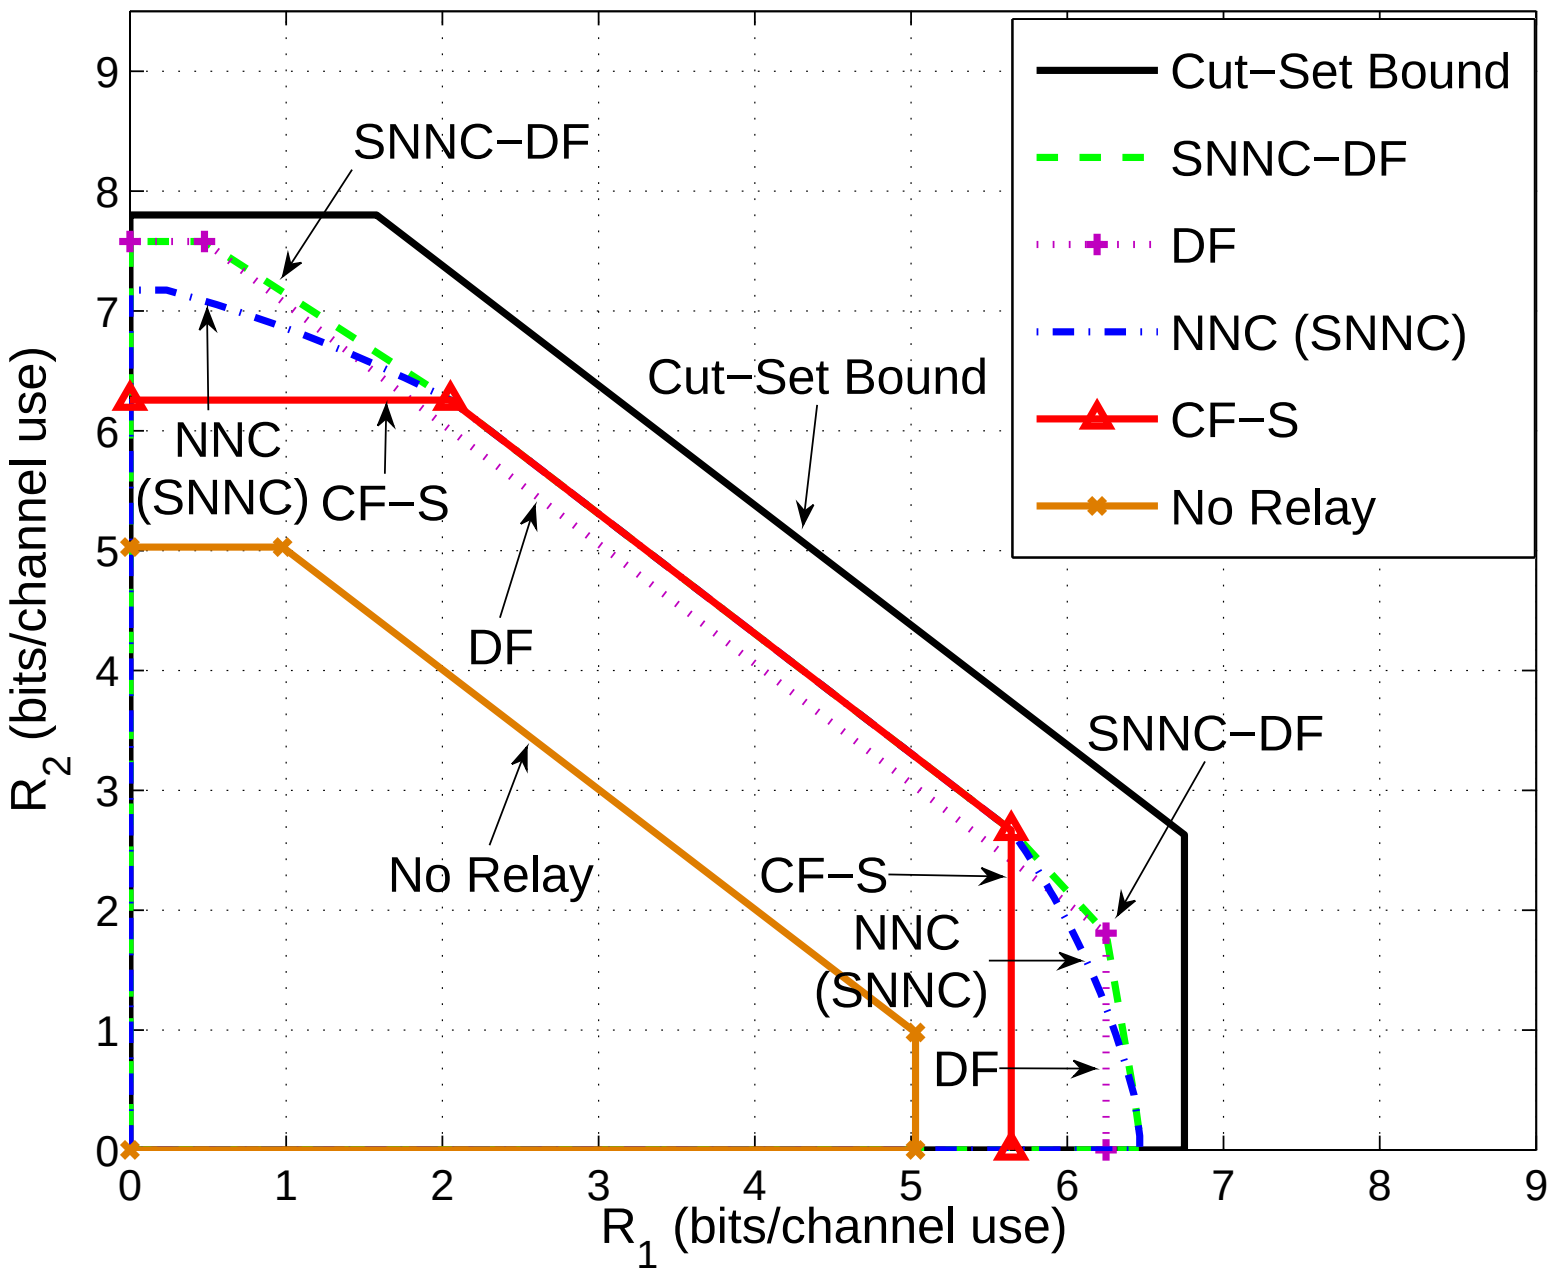

Fig. 12. Achievable rate regions for a MARC with no fading.

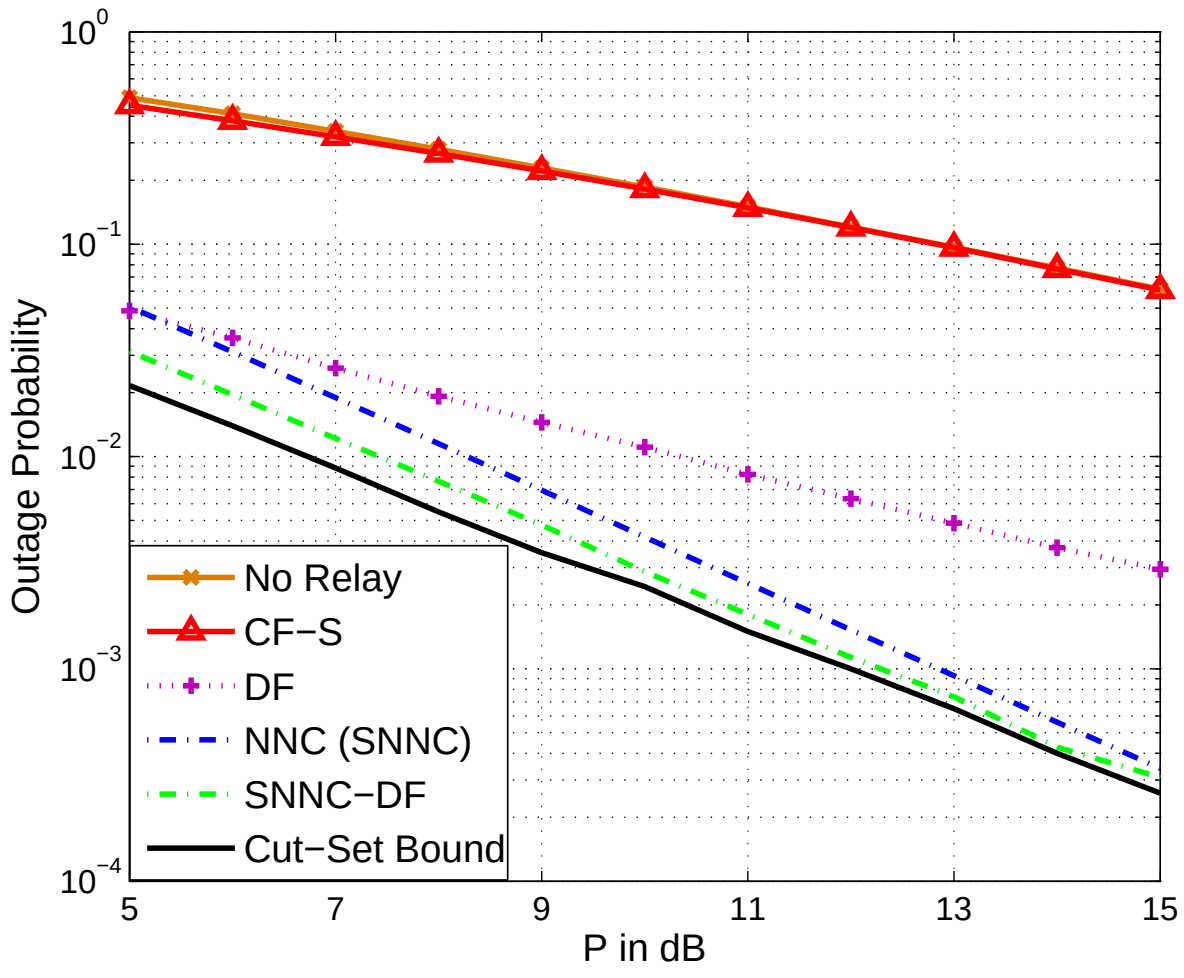

Fig. 13. Outage probabilities for a MARC with Rayleigh fading.

2) Slow Rayleigh Fading: Fig. 13 depicts the outage probabilities with $R_{\text{tar1}} = R_{\text{tar2}} = 1$, $P_1 = P_2 = P_3 = P$, $d_{13} = 0.3$, $d_{23} = 0.4$, $d_{14} = d_{24} = 1$, $d_{34} = 0.6$ and $\alpha = 3$. CF-S has the worst outage probability because it requires a reliable relay-destination link to decode the bin and quantization indices. DF has better outage probability than CF-S, while NNC (or SNNC) improves on DF over the entire power range. SNNC-DF has the relay perform DF or QF depending on channel quality and gains 1 dB at low power and 0.5 dB at high power over SNNC.

Remark 5: The gain of SNNC-DF over SNNC is not very large at high power. This is because the MARC has one relay only. For networks with more relays we expect larger gains from SNNC-DF.

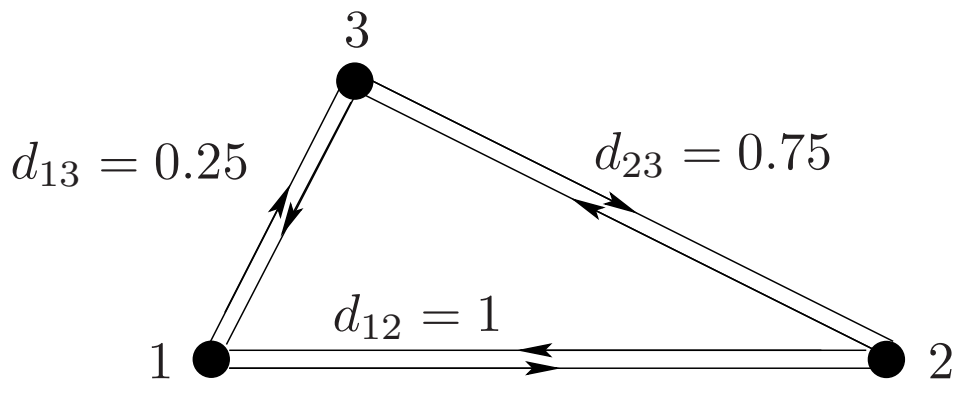

Fig. 14. A TWRC.

D. Two-Way Relay Channels

The Gaussian TWRC (Fig. 14) has

$$Y_1 = G_{21}X_2 + G_{31}X_3 + Z_1 \tag{77}$$
$$Y_2 = G_{12}X_1 + G_{32}X_3 + Z_2 \tag{78}$$
$$Y_3 = G_{13}X_1 + G_{23}X_2 + Z_3 \tag{79}$$

where nodes 1 and 2 exchange messages with the help of relay node 3.

1) No Fading: Fig. 14 depicts the geometry and Fig. 15 depicts the achievable sum rates for $P_1 = 5P, P_2 = 2P, P_3 = P$ and $\alpha = 3$. DF gives the best rates at low power while SNNC provides better rates at high power. The CF-S rates are slightly lower than the SNNC rates over the entire power range. SNNC-DF combines the advantages of SNNC and DF and achieves the best rates throughout.

2) Slow Rayleigh Fading: Fig. 16 depicts the outage probabilities with $R_{\text{tar1}} = 2$, $R_{\text{tar2}} = 1$, $P_1 = 5P$, $P_2 = 2P$, $P_3 = P$, the geometry of Fig. 14 and $\alpha = 3$. CF-S has the worst outage probability since it requires that both relay-destination links ($3-1$ and $3-2$) are reliable so that the bin

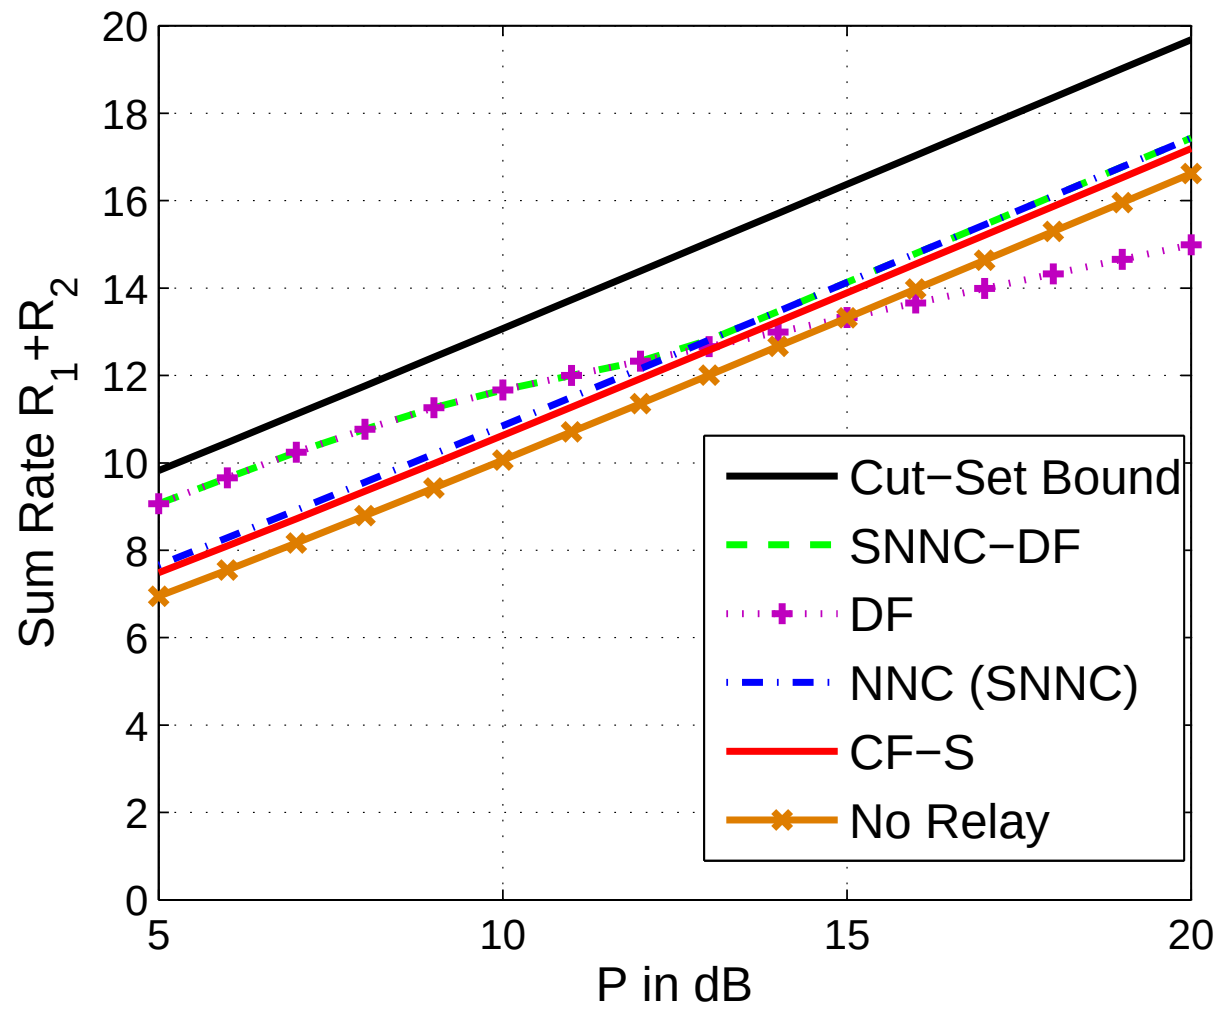

Fig. 15. Achievable sum rates (in bits per channel use) for a TWRC with no fading.

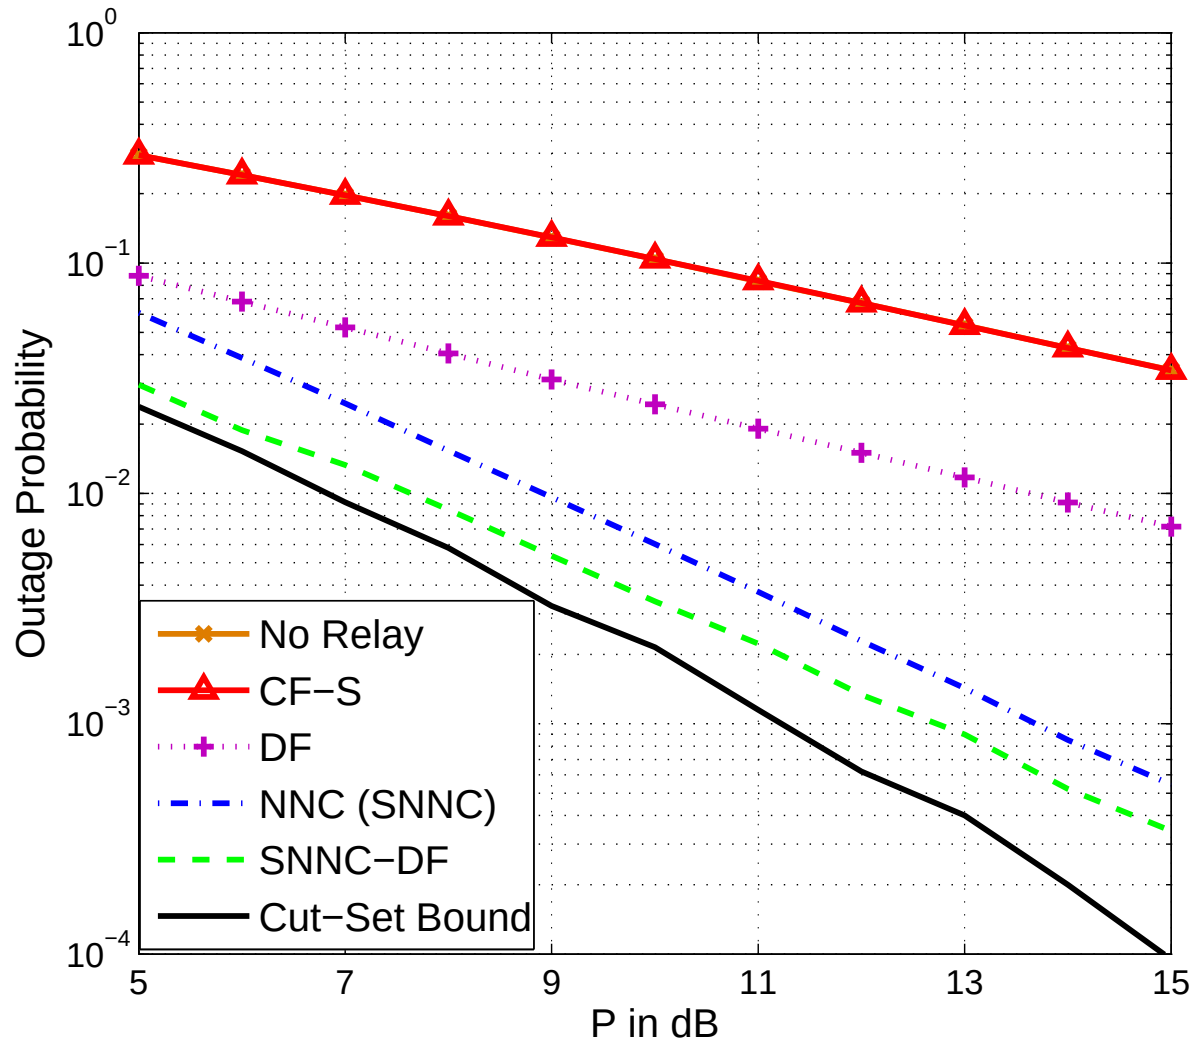

Fig. 16. Outage probabilities for a TWRC with Rayleigh fading.

and quantization indices can be recovered at both destinations 1 and 2. DF is better than CF-S, while NNC (or SNNC) improves on DF. SNNC-DF lets the relay use DF or QF depending on the channel conditions and gains over about 2 dB at low power and 1 dB at high over NNC (or SNNC).

VII. CONCLUDING REMARKS

SNNC with joint or backward decoding was shown to achieve the same rates as NNC for multicasting multiple messages in memoryless networks. Although SNNC has extra constraints on the rates, these constraints give insight on the best decoding procedure. SNNC enables early decoding at nodes, and this enables the use of SNNC-DF. Numerical examples demonstrate that SNNC-DF shows reasonable gains as compared to DF, CF-S and NNC in terms of rates and outage probabilities.

APPENDIX A
SNNC WITH JOINT DECODING

After block $B+K\cdot(K-1)$ every node $k\in\mathcal{K}$ can reliably recover $\mathbf{l}_B=(l_{1B},\ldots,l_{KB})$ via the multihopping of the last $K(K-1)$ blocks.

Let $\epsilon_1>\epsilon$. Node k tries to find a $(\hat{\mathbf{w}}_1^{(k)},\ldots,\hat{\mathbf{w}}_B^{(k)})$ and $(\hat{\mathbf{l}}_1^{(k)},\ldots,\hat{\mathbf{l}}_B^{(k)})$ such that the event (22) occurs for *all* $j=1,\ldots,B$, where $\mathbf{l}_B$ is already known. The difference between *joint decoding* and *backward decoding* is that the typicality test is performed jointly over all blocks (see (80)-(82) below) while it is performed in only one block in (23)-(25).

Error Probability: Let $\mathbf{1}=(1,\ldots,1)$. Assume without loss of generality that $\mathbf{w}_j=\mathbf{1}$ and $\mathbf{l}_j=\mathbf{1}$ for $j=1,\ldots,B$. For any $\mathcal{S}\subset\mathcal{K}$, define

$$\mathbf{w}_{(\mathcal{S})j}=[w_{ij}:\ i\in\mathcal{S}].$$

The error events at decoder k are:

$$E_{k0}:\cup_{j=1}^{B}\cap_{l_{kj}}\ E_{0(kj)}^{\mathrm{c}}(l_{kj}) \tag{80}$$

$$E_{k1}:(\cap_{j=1}^{B}E_{1(kj)}(\mathbf{1},\mathbf{1},\mathbf{1}))^{\mathrm{c}} \tag{81}$$

$$E_{k2}:\cup_{(\mathbf{w}_{\widetilde{\mathcal{D}}_k}^{B}\neq\mathbf{1},\mathbf{w}_{\widetilde{\mathcal{D}}_k^{\mathrm{c}}}^{B})}\cup_{\mathbf{l}^B}\cap_{j=1}^{B}\ E_{1(kj)}(\mathbf{w}_j,\mathbf{l}_{j-1},\mathbf{l}_j) \tag{82}$$

The error event $E_k=\cup_{i=0}^{2}E_{ki}$ at node k thus satisfies

$$\Pr[E_k]\le\Pr[E_{k0}]+\Pr[E_{k1}]+\Pr[E_{k2}] \tag{83}$$

where we have used the union bound.

$\Pr[E_{k0}]$ can be made small with large n as long as (see (27))

$$\hat{R}_k>I(\hat{Y}_k;Y_k|X_k)+\delta_\epsilon(n). \tag{84}$$

Also, we have

$$\begin{aligned}\Pr[E_{k1}]&=\Pr[(\cap_{j=1}^{B}E_{1(kj)}(\mathbf{1},\mathbf{1},\mathbf{1}))^{\mathrm{c}}]\\&=\Pr[\cup_{j=1}^{B}E_{1(kj)}^{\mathrm{c}}(\mathbf{1},\mathbf{1},\mathbf{1})]\\&\le\sum_{j=1}^{B}\Pr[E_{1(kj)}^{\mathrm{c}}(\mathbf{1},\mathbf{1},\mathbf{1})]\\&\overset{(a)}{\le}B\cdot\delta_{\epsilon_1}(n)\\&=\delta_{\epsilon_1}(n,B)\end{aligned} \tag{85}$$

where (a) follows because $\Pr[E_{1(kj)}^{\mathrm{c}}(\mathbf{1},\mathbf{1},\mathbf{1})]\le\delta_{\epsilon_1}(n)$, which goes to zero as $n\to\infty$, for $j=1,\ldots,B$ [12].

To bound $\Pr\big[E_{k2}\big]$, for each $(\mathbf{w}_j,\mathbf{l}_{j-1})$, we define

$$\mathcal{S}_j(\mathbf{w}_j,\mathbf{l}_{j-1})=\{i\in\mathcal{K}:w_{ij}\neq1\text{ or }l_{i(j-1)}\neq1\} \tag{86}$$

and write $\mathcal{S}_j=\mathcal{S}_j(\mathbf{w}_j,\mathbf{l}_{j-1})$. Observe that for $j=1,\ldots,B:$

- $(\mathbf{X}_{\mathcal{S}_j},\hat{\mathbf{Y}}_{\mathcal{S}_j})$ is independent of $(\mathbf{X}_{\mathcal{S}_j^{\mathrm{c}}},\hat{\mathbf{Y}}_{\mathcal{S}_j^{\mathrm{c}}},\mathbf{Y}_{kj})$ in the random coding experiment;
- the $(X_{ij},\hat{Y}_{ij})$, $i\in\mathcal{S}_j$, are mutually independent.

We have (see (31) and (32)):

$$\Pr\big[E_{1(kj)}(\mathbf{w}_j,\mathbf{l}_{j-1},\mathbf{l}_j)\big]\le P_{(kj)}(\mathcal{S}_j) \tag{87}$$

where

$$P_{(kj)}(\mathcal{S}_j)=\begin{cases}2^{-n(I_{\mathcal{S}_j}-\delta_{\epsilon_1}(n))} & \text{if }\mathcal{S}_j\neq\emptyset\\1 & \text{otherwise}\end{cases} \tag{88}$$

Block	1	2	$\cdots$	B	$B+1$	$B+2\cdots B+4$
X_1	$\mathbf{x}_{11}(w_1)$	$\mathbf{x}_{12}(w_2)$	$\cdots$	$\mathbf{x}_{1B}(w_B)$	$\mathbf{x}_{1(B+1)}(1)$	Multihop l_{B+1} to node 4 in $3n'$ channel uses
X_2	$\mathbf{x}_{21}(1)$	$\mathbf{x}_{22}(w_1)$	$\cdots$	$\mathbf{x}_{2B}(w_{(B-1)})$	$\mathbf{x}_{2(B+1)}(w_B)$	
X_3	$\mathbf{x}_{31}(1)$	$\mathbf{x}_{32}(l_1)$	$\cdots$	$\mathbf{x}_{3B}(l_{B-1})$	$\mathbf{x}_{3(B+1)}(l_B)$	
$\hat{Y}_3$	$\hat{\mathbf{y}}_{31}(l_1\|1)$	$\hat{\mathbf{y}}_{32}(l_2\|l_1)$	$\cdots$	$\hat{\mathbf{y}}_{3B}(l_B\|l_{B-1})$	$\hat{\mathbf{y}}_{3(B+1)}(l_{B+1}\|l_B)$	

TABLE III
CODING SCHEME FOR THE TWO-RELAY CHANNEL WITHOUT BLOCK MARKOV CODING AT THE SOURCE.

and $\delta_{\epsilon_1}(n) \to 0$ as $n \to \infty$.

By the union bound, we have

$$
\begin{aligned}
\Pr[E_{k2}] &\leq \sum_{\left(\mathbf{w}^B_{\widetilde{\mathcal{D}}_k}\neq \mathbf{1}, \mathbf{w}^B_{\widetilde{\mathcal{D}}^{\mathrm{c}}_k}\right)} \sum_{\mathbf{l}^{B-1}} \Pr[\cap_{j=1}^B E_{1(kj)}\left(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{l}_j\right)] \\
&\overset{(a)}{=} \sum_{\left(\mathbf{w}^B_{\widetilde{\mathcal{D}}_k}\neq \mathbf{1}, \mathbf{w}^B_{\widetilde{\mathcal{D}}^{\mathrm{c}}_k}\right)} \sum_{\mathbf{l}^{B-1}} \prod_{j=1}^{B} \Pr[E_{1(kj)}\left(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{l}_j\right)] \\
&\overset{(b)}{\leq} \left[\sum_{\mathbf{w}^B, \mathbf{l}^{B-1}} \prod_{j=1}^{B} \Pr[E_{1(kj)}\left(\mathbf{w}_j, \mathbf{l}_{j-1}, \mathbf{l}_j\right)]\right] \\
&\qquad - \prod_{j=1}^{B} \Pr[E_{1(kj)}\left(\mathbf{1}, \mathbf{1}, \mathbf{1}\right)] \\
&\overset{(c)}{\leq} \left[\sum_{\mathbf{w}^B, \mathbf{l}^{B-1}} \prod_{j=1}^{B} P_{(kj)}(\mathcal{S}_j)\right] - (1-\delta_{\epsilon_1}(n,B)) \\
&\overset{(d)}{=} \left[\prod_{j=1}^{B} \sum_{\mathbf{w}_j, \mathbf{l}_{j-1}} P_{(kj)}(\mathcal{S}_j)\right] - (1-\delta_{\epsilon_1}(n,B)) \\
&\overset{(e)}{<} \prod_{j=1}^{B}\left(1 + \sum_{\substack{\mathcal{S}:k\in\mathcal{S}^{\mathrm{c}}\\ \mathcal{S}\neq\emptyset}} \sum_{\substack{(\mathbf{w}_j, \mathbf{l}_{j-1})\neq(\mathbf{1},\mathbf{1}):\\ \mathcal{S}_j(\mathbf{w}_j, \mathbf{l}_{j-1})=\mathcal{S}}} 2^{-n(I_{\mathcal{S}}-\delta_{\epsilon_1}(n))}\right) \\
&\qquad - (1-\delta_{\epsilon_1}(n,B)) \\
&\overset{(f)}{<} \left(1 + \sum_{\substack{\mathcal{S}:k\in\mathcal{S}^{\mathrm{c}}\\ \mathcal{S}\neq\emptyset}} 3^{|\mathcal{S}|} 2^{n\left(R_{\mathcal{S}}+\hat{R}_{\mathcal{S}}\right)-(I_{\mathcal{S}}-\delta_{\epsilon_1}(n)))}\right)^B \\
&\qquad - (1-\delta_{\epsilon_1}(n,B)) \qquad (89)
\end{aligned}
$$

where

(a) follows because the codebooks are independent and the channel is memoryless

(b) follows by adding $\left(\mathbf{w}^B_{\widetilde{\mathcal{D}}_k} = \mathbf{1}, \mathbf{w}^B_{\widetilde{\mathcal{D}}^{\mathrm{c}}_k}\right)$ to the sum

(c) follows from (87) and because (see (85))

$$
\begin{aligned}
\Pr[\cap_{j=1}^B E_{1(kj)}(\mathbf{1},\mathbf{1},\mathbf{1})] &= \prod_{j=1}^{B} \Pr[E_{1(kj)}(\mathbf{1},\mathbf{1},\mathbf{1})] \\
&= 1 - \Pr[(\cap_{j=1}^B E_{1(kj)}(\mathbf{1},\mathbf{1},\mathbf{1}))^{\mathrm{c}}] \\
&\geq 1 - \delta_{\epsilon_1}(n,B) \qquad (90)
\end{aligned}
$$

(d) follows because $P_{(kj)}(\mathcal{S}_j)$ depends only on $\mathcal{S}_j$ which in turn depends only on $(\mathbf{w}_j, \mathbf{l}_{j-1})$

(e) follows from (88)

(f) follows from (33).

Performing the same steps as in (35) and (36), we require

$$R_{\mathcal{S}} < I^{\mathcal{K}}_{\mathcal{S}}(k) \qquad (91)$$

for all subsets $\mathcal{S} \subset \mathcal{K}$ such that $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \neq \emptyset$. We can again split the bounds in (91) into two classes:

$$\text{Class 1}: \mathcal{S} \cap \widetilde{\mathcal{D}}_k \neq \emptyset \qquad (92)$$

$$\text{Class 2}: \mathcal{S} \cap \widetilde{\mathcal{D}}_k = \emptyset \text{ or equivalently } \mathcal{S} \subseteq \widetilde{\mathcal{D}}^{\mathrm{c}}_k \qquad (93)$$

and show that the constraints in (93) at node k are redundant with the same argument used for backward decoding. By the union bound, the error probability for all destinations tends to zero as $n \to \infty$ if the rate tuple $(R_1, \ldots, R_K)$ satisfies (42) for all subsets $\mathcal{S} \subset \mathcal{K}$ such that $k \in \mathcal{S}^{\mathrm{c}}$ and $\mathcal{S} \neq \emptyset$, and for any joint distribution that factors as (43).

APPENDIX B
CODING SCHEME FOR THE TWO-RELAY CHANNEL WITHOUT BLOCK MARKOV CODING

We present a coding scheme without block Markov coding at the source for the two-relay channel. The destination performs either backward decoding or joint decoding. We show that joint decoding can achieve better rates than backward decoding.

Table III shows the encoding procedure. The message w of nBR bits is split into B equally sized blocks $w_1, \ldots, w_B$ each of nR bits and is transmitted over $B+4$ blocks.

Random Code: Fix a distribution $p(x_1)p(x_2)p(x_3)p(\hat{y}_3|y_3, x_3)$. For each $j = 1, \ldots, B+1$, generate 2^{nR} codewords $\mathbf{x}_{1j}(w)$ and $\mathbf{x}_{2j}(w)$, $w = 1, \ldots, 2^{nR}$, by using $\prod_{i=1}^n P_{X_1}(x_{1ji})$ and $\prod_{i=1}^n P_{X_2}(x_{2ji})$, respectively. Further generate $2^{n\hat{R}}$ codewords $\mathbf{x}_{3j}(l_{j-1})$, $l_{j-1} = 1, \ldots, 2^{n\hat{R}}$, using $\prod_{i=1}^n P_{X_3}(x_{3ji})$. For each l_{j-1}, generate $2^{n\hat{R}}$ reconstructions $\hat{\mathbf{y}}_{3j}(l_j|l_{j-1})$, $l_j = 1, \ldots, 2^{n\hat{R}}$, using $\prod_{i=1}^n P_{\hat{Y}_3|X_3}(\hat{y}_{3ji}|x_{3ji}(l_{j-1}))$.

For block $B+2$ to $B+4$, generate $2^{n'\hat{R}}$ codewords as in Theorem 1, where (see (20))

$$n' = \frac{n\hat{R}}{R_{34}}. \qquad (94)$$

Encoding: Node 3 upon receiving $\mathbf{y}_{3j}$ at the end of block j, tries to find an index l_j such that

$$(\hat{\mathbf{y}}_{3j}(l_j|l_{j-1}), \mathbf{x}_{3j}(l_{j-1}), \mathbf{y}_{3j}) \in T^n_\epsilon(P_{\hat{Y}_3 X_3 Y_3}) \qquad (95)$$

where $l_0 = 1$ by convention. If there is no such index l_j, set $l_j = 1$. If there is more than one, choose one.

In each block $j = 1, \dots, B+1$, node 1 transmits $\mathbf{x}_{1j}(w_j)$, node 2 transmits $\mathbf{x}_{2j}(w_{j-1})$ assuming correct decoding in block $j-1$, and node 3 transmits $\mathbf{x}_{3j}(l_{j-1})$, where $w_0 = w_{B+1} = 1$.

In block $j = B+2, \dots, B+4$, node 3 conveys l_{B+1} reliably to node 4 by sending $\mathbf{x}_{3j}(l_B)$ by using multihopping at rate $\hat{R}$ through the network.

Decoding at Relays:

1) Node 2. For $j = 1, \dots, B$, node 2 tries to find a $\hat{w}_j$ that satisfies

$$(\mathbf{x}_1(\hat{w}_j), \mathbf{x}_2(w_{j-1}), \mathbf{y}_{2j}) \in T_\epsilon^n(P_{X_1X_2Y_2}). \tag{96}$$

Node 2 can reliably decode w_j if

$$R < I(X_1; Y_2|X_2) - \delta_\epsilon(n) \tag{97}$$

where $\delta_\epsilon(n) \to 0$ as $n \to \infty$ (see [12]).

2) Node 3. For $j = 1, \dots, B+1$, node 3 successfully finds an l_j such that (95) is satisfied if

$$\hat{R} > I(\hat{Y}_3; Y_3|X_3) + \delta_\epsilon(n) \tag{98}$$

where $\delta_\epsilon(n) \to 0$ as $n \to \infty$ (see [12]).

A. Backward Decoding at Node 4

At the end of block $B+4$, node 4 can reliably recover l_{B+1}, via the multihopping of the last 3 blocks. Let $\epsilon_1 > \epsilon$. For $j = B, \dots, 1$, node 4 declares $(w_j, l_j) = (\hat{w}_j, \hat{l}_j)$, if there is a unique pair $(\hat{w}_j, \hat{l}_j)$ satisfying the typicality checks in both blocks $j+1$ and j:

$$\Big(\mathbf{x}_{1(j+1)}(w_{j+1}), \mathbf{x}_{2(j+1)}(\hat{w}_j), \mathbf{x}_{3(j+1)}(\hat{l}_j), \hat{\mathbf{y}}_{3(j+1)}(l_{j+1}|\hat{l}_j), \mathbf{y}_{4(j+1)}\Big) \in T_{\epsilon_1}^n\left(P_{X_1X_2X_3\hat{Y}_3Y_4}\right) \tag{99}$$

and

$$(\mathbf{x}_{1j}(\hat{w}_j), \mathbf{y}_{4j}) \in T_{\epsilon_1}^n(P_{X_1Y_4}) \tag{100}$$

where w_{j+1} and l_{j+1} have already been reliably decoded from the previous block $j+1$.

Similar analysis as in Theorem 1 shows that node 4 can reliably recover (w_j, l_j) if

$$R < I(X_1; Y_4) + I(X_2; \hat{Y}_3Y_4|X_1X_3) \tag{101}$$

$$R < I(X_1X_2X_3; Y_4) - I(\hat{Y}_3; Y_3|X_1X_2X_3Y_4) \tag{102}$$

$$0 \le I(X_3; Y_4|X_1X_2) - I(\hat{Y}_3; Y_3|X_1X_2X_3Y_4) \tag{103}$$

If the constraint (103) is violated, then the rate bound (102) becomes

$$R < I(X_1X_2; Y_4) \tag{104}$$

which is a stronger bound than (101) and can be achieved with SNNC-DF by treating X_3 as noise. Thus, we may ignore (103). Continuing this way, node 4 successively decodes all messages w_j, $j = 1, \dots, B$.

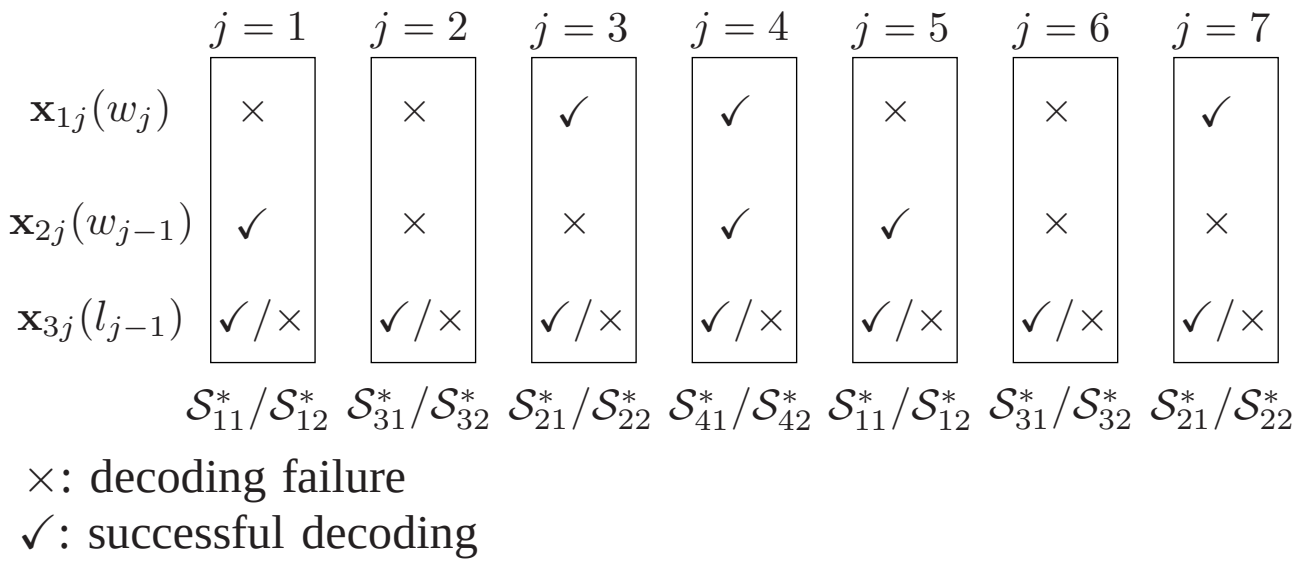
$j=1$
$j=2$
$j=3$
$j=4$
$j=5$
$j=6$
$j=7$
$\mathbf{x}_{1j}(w_j)$
$\mathbf{x}_{2j}(w_{j-1})$
$\mathbf{x}_{3j}(l_{j-1})$
× × ✓ ✓ × × ✓
✓ × × ✓ ✓ × ×
✓/× ✓/× ✓/× ✓/× ✓/× ✓/× ✓/×
$\mathcal{S}_{11}^*/\mathcal{S}_{12}^*$ $\mathcal{S}_{31}^*/\mathcal{S}_{32}^*$ $\mathcal{S}_{21}^*/\mathcal{S}_{22}^*$ $\mathcal{S}_{41}^*/\mathcal{S}_{42}^*$ $\mathcal{S}_{11}^*/\mathcal{S}_{12}^*$ $\mathcal{S}_{31}^*/\mathcal{S}_{32}^*$ $\mathcal{S}_{21}^*/\mathcal{S}_{22}^*$
×: decoding failure
✓: successful decoding

Fig. 17. An example of $(\tilde{\mathcal{S}}_1, \dots, \tilde{\mathcal{S}}_{B+1})_{\text{poss}}$ with $B = 6$.

Combining (97), (101) and (102), SNNC-DF with backward decoding but without block Markov coding achieves rates satisfying

$$R_{\text{SNNC-DF}} < \min\Big\{I(X_1; Y_2|X_2), I(X_1; Y_4) + I(X_2; \hat{Y}_3Y_4|X_1X_3), I(X_1X_2X_3; Y_4) - I(\hat{Y}_3; Y_3|X_1X_2X_3Y_4)\Big\}. \tag{105}$$

B. Joint Decoding at Node 4

Node 4 tries to find a $\hat{w}^B = (\hat{w}_1, \hat{w}_2, \dots, \hat{w}_B)$ and $\hat{l}^B = (\hat{l}_1, \dots, \hat{l}_B)$ such that the following event occurs:

$$E_{1(4j)}(\hat{w}_j, \hat{w}_{j-1}, \hat{l}_{j-1}, \hat{l}_j) : \Big(\mathbf{x}_{1j}(\hat{w}_j), \mathbf{x}_{2j}(\hat{w}_{j-1}), \mathbf{x}_{3j}(\hat{l}_{j-1}), \hat{\mathbf{y}}_{3j}(\hat{l}_j|\hat{l}_{j-1}), \mathbf{y}_{4j}\Big) \in T_{\epsilon_1}^n\left(P_{X_1X_2X_3\hat{Y}_3Y_4}\right) \tag{106}$$

for all $j = 1, \dots, B+1$, where $w_0 = w_{B+1} = 1$ and l_{B+1} is already known.

Error Probability: Let $\mathbf{1} = (1, \dots, 1)$. Assume without loss of generality that $w^B = \mathbf{1}$ and $l^{B+1} = \mathbf{1}$. The error events are as follows:

$$E_{41} : \left(\cap_{j=1}^{B+1} E_{1(4j)}(1,1,1,1)\right)^c \tag{107}$$

$$E_{42} : \cup_{w^B \neq \mathbf{1}} \cup_{l^B} \cap_{j=1}^{B+1} E_{1(4j)}(w_j, w_{j-1}, l_j, l_{j-1}) \tag{108}$$

The error event $E_4 = \cup_{i=1}^2 E_{4i}$ satisfies

$$\Pr[E_4] \le \Pr[E_{41}] + \Pr[E_{42}] \tag{109}$$

where we have used the union bound. Performing the same steps as in (85), we have

$$\Pr[E_{41}] \le (B+1) \cdot \delta_{\epsilon_1}(n) \tag{110}$$

which goes to zero as $n \to \infty$.

To bound $\Pr[E_{42}]$, for every (w_j, w_{j-1}, l_{j-1}), $j = 1, \dots, B+1$, we define $\mathcal{S}_j(w_j, w_{j-1}, l_{j-1}) \subseteq \{1,2,3\}$ that can take on one of the 8 values

$$\begin{cases} \mathcal{S}_{11}^* = \{1\}, & \mathcal{S}_{12}^* = \{1,3\} \\ \mathcal{S}_{21}^* = \{2\}, & \mathcal{S}_{22}^* = \{2,3\} \\ \mathcal{S}_{31}^* = \{1,2\}, & \mathcal{S}_{32}^* = \{1,2,3\} \\ \mathcal{S}_{41}^* = \{\emptyset\}, & \mathcal{S}_{42}^* = \{3\} \end{cases} \tag{111}$$

where $\mathcal{S}_{mu}^*$, $m = 1, \dots, 4, u = 1, 2$, indicates which of the messages w_j, w_{j-1} and l_{j-1} are incorrectly decoded (1 refers to w_j, 2 refers to w_{j-1} and 3 refers to l_{j-1}). We write $\mathcal{S}_j = \mathcal{S}_j(w_j, w_{j-1}, l_{j-1})$. For example, in Fig. 17 in block $j = 1$ the message w_j is decoded in error while w_{j-1} is decoded correctly. If l_{j-1} is decoded correctly we consider $\mathcal{S}_j = \mathcal{S}_{11}^*$ while if l_{j-1} is decoded incorrectly we consider $\mathcal{S}_j = \mathcal{S}_{12}^*$. Observe that $(\mathbf{X}_{\mathcal{S}_j}, \hat{\mathbf{Y}}_{\mathcal{S}_j})$ is independent of $(\mathbf{X}_{\mathcal{S}_j^c}, \hat{\mathbf{Y}}_{\mathcal{S}_j^c}, \mathbf{Y}_{4j})$ in the random coding experiment. We have (see (31) and (32)):

$$\Pr[E_{1(4j)}(w_j, w_{j-1}, l_j, l_{j-1})] \leq P_{(4j)}(\mathcal{S}_j) \tag{112}$$

where

$$P_{(4j)}(\mathcal{S}_j) = \begin{cases} 2^{-n(I_{\mathcal{S}_j} - \delta_{\epsilon_1}(n))} & \text{if } \mathcal{S}_j \neq \emptyset \\ 1 & \text{otherwise} \end{cases} \tag{113}$$

where $I_{\mathcal{S}_j}$ is defined in (32) with $K = 4$ and $\hat{Y}_2 = \emptyset$ and $\delta_{\epsilon_1}(n)$ goes to zero as $n \to \infty$. By the union bound, we have

$$\begin{aligned}
&\Pr[E_{42}] \\
&= \Pr\Big[\cup_{w^B \neq \mathbf{1}} \cup_{l^B} \cap_{j=1}^{B+1}\ E_{1(4j)}(w_j, w_{j-1}, l_j, l_{j-1})\Big] \\
&\overset{(a)}{\leq} \sum_{w^B \neq \mathbf{1}} \sum_{l^B} \prod_{j=1}^{B+1} \Pr\left[E_{1(4j)}(w_j, w_{j-1}, l_j, l_{j-1}))\right] \\
&\overset{(b)}{\leq} \sum_{w^B \neq \mathbf{1}} \sum_{l^B} \prod_{j=1}^{B+1} P_{(4j)}(\mathcal{S}_j) \\
&\overset{(c)}{\leq} \sum_{w^B \neq \mathbf{1}} \sum_{l^B} 2^{-n\sum_{j=1:\mathcal{S}_j \neq \emptyset}^{B+1}(I_{\mathcal{S}_j} - \delta_{\epsilon_1}(n))}
\end{aligned} \tag{114}$$

where

(a) follows because the codebooks are independent and the channel is memoryless
(b) follows from (112)
(c) follows from (113).

Observe that for any $w^B \neq \mathbf{1}$ and l^B, due to the encoding (Fig. 17), only certain sequences $(\mathcal{S}_1 \ldots \mathcal{S}_{B+1})$ can occur, namely those for which

- $\mathcal{S}_{2v}^*$ or $\mathcal{S}_{3v}^*$ follow $\mathcal{S}_{1u}^*$
- $\mathcal{S}_{1v}^*$ or $\mathcal{S}_{4v}^*$ follow $\mathcal{S}_{2u}^*$
- $\mathcal{S}_{2v}^*$ or $\mathcal{S}_{3v}^*$ follow $\mathcal{S}_{3u}^*$
- $\mathcal{S}_{1v}^*$ or $\mathcal{S}_{4v}^*$ follow $\mathcal{S}_{4u}^*$
- the total number of $\mathcal{S}_{11}^*$ and $\mathcal{S}_{12}^*$ is the same as the total number of $\mathcal{S}_{21}^*$ and $\mathcal{S}_{22}^*$

with $u, v = 1, 2$. Denote these sequences as $(\mathcal{S}_1 \ldots \mathcal{S}_{B+1})_{\text{poss}}$. The reason that only the $(\mathcal{S}_1 \ldots \mathcal{S}_{B+1})_{\text{poss}}$ sequences can occur is as follows. Suppose we find a wrong $\mathbf{x}_{1j}(w_j)$ in block j, then $\mathbf{x}_{2(j+1)}(w_j)$ in block $j+1$ is wrong as well. In this case, we could have $\mathcal{S}_{3v}^*$ follow $\mathcal{S}_{1u}^*$. Suppose we find the right $\mathbf{x}_{1j}(w_j)$, then $\mathbf{x}_{2(j+1)}(w_j)$ will also be right so we could have $\mathcal{S}_{4v}^*$ follow $\mathcal{S}_{2u}^*$. For example, a $(\mathcal{S}_1 \ldots \mathcal{S}_{B+1})_{\text{poss}}$ sequence could be

$$\begin{aligned}
&(\mathcal{S}_{41}^*\mathcal{S}_{42}^* \ldots \mathcal{S}_{41}^*)\mathcal{S}_{11}^*(\mathcal{S}_{31}^*\mathcal{S}_{32}^* \ldots \mathcal{S}_{31}^*)\mathcal{S}_{21}^* \cdots (\mathcal{S}_{42}^*\mathcal{S}_{41}^* \ldots \mathcal{S}_{42}^*) \\
&\ldots \mathcal{S}_{12}^*(\mathcal{S}_{32}^*\mathcal{S}_{31}^* \ldots \mathcal{S}_{32}^*)\mathcal{S}_{22}^* \cdots .
\end{aligned}$$

For a given $(\mathcal{S}_1 \ldots \mathcal{S}_{B+1})_{\text{poss}}$, let n_{mu} be the number of $\mathcal{S}_{mu}^*$, $m = 1, \ldots, 4$, $u = 1, 2$. We have

$$\sum_{m=1}^{4}\sum_{u=1}^{2} n_{mu} = B + 1 \tag{115}$$

$$n_{11} + n_{12} = n_{21} + n_{22} \tag{116}$$

and

$$\begin{aligned}
\sum_{j=1:\mathcal{S}_j \neq \emptyset}^{B+1} I_{\mathcal{S}_j} &= n_{11}I_{\mathcal{S}_{11}^*} + n_{12}I_{\mathcal{S}_{12}^*} + n_{21}I_{\mathcal{S}_{21}^*} + n_{22}I_{\mathcal{S}_{22}^*} \\
&\quad + n_{31}I_{\mathcal{S}_{31}^*} + n_{32}I_{\mathcal{S}_{32}^*} + n_{42}I_{\mathcal{S}_{42}^*} \\
&= e_{11}(I_{\mathcal{S}_{11}^*} + I_{\mathcal{S}_{21}^*}) + e_{12}(I_{\mathcal{S}_{11}^*} + I_{\mathcal{S}_{22}^*}) + e_{21}(I_{\mathcal{S}_{12}^*} + I_{\mathcal{S}_{21}^*}) \\
&\quad + e_{22}(I_{\mathcal{S}_{12}^*} + I_{\mathcal{S}_{22}^*}) + n_{31}I_{\mathcal{S}_{31}^*} + n_{32}I_{\mathcal{S}_{32}^*} + n_{42}I_{\mathcal{S}_{42}^*}
\end{aligned} \tag{117}$$

where

$$\begin{cases}
I_{\mathcal{S}_{11}^*} = I(X_1; \hat{Y}_3 Y_4 | X_2 X_3) \\
I_{\mathcal{S}_{12}^*} = I(X_1 X_3; Y_4 | X_2) + I(\hat{Y}_3; X_1 X_2 Y_4 | X_3) \\
I_{\mathcal{S}_{21}^*} = I(X_2; \hat{Y}_3 Y_4 | X_1 X_3) \\
I_{\mathcal{S}_{22}^*} = I(X_2 X_3; Y_4 | X_1) + I(\hat{Y}_3; X_1 X_2 Y_4 | X_3) \\
I_{\mathcal{S}_{31}^*} = I(X_1 X_2; \hat{Y}_3 Y_4 | X_3) \\
I_{\mathcal{S}_{32}^*} = I(X_1 X_2 X_3; Y_4) + I(\hat{Y}_3; X_1 X_2 Y_4 | X_3) \\
I_{\mathcal{S}_{42}^*} = I(X_3; Y_4 | X_1 X_2) + I(\hat{Y}_3; X_1 X_2 Y_4 | X_3)
\end{cases} \tag{118}$$

and $e_{11}, e_{12}, e_{21}, e_{22}$ are non-negative integers that satisfy

$$\begin{aligned}
e_{11} + e_{12} &= n_{11} \\
e_{21} + e_{22} &= n_{12} \\
e_{11} + e_{21} &= n_{21} \\
e_{12} + e_{22} &= n_{22}.
\end{aligned} \tag{119}$$

We remark that the choice of $(e_{11}, e_{12}, e_{21}, e_{22})$ is not unique. For example, if $n_{11} = 5$, $n_{12} = 10$, $n_{21} = 7$ and $n_{22} = 8$ we have $n_{11} + n_{12} = n_{21} + n_{22} = 15$. We can have $(e_{11}, e_{12}, e_{21}, e_{22}) = (2, 3, 5, 5)$ or $(e_{11}, e_{12}, e_{21}, e_{22}) = (0, 5, 7, 3)$. Both choices satisfy (119). Further, the number of (w_j, l_j, l_{j-1}) that result in the same $(\mathcal{S}_j, \mathcal{S}_{j+1}) = (\mathcal{S}_{1u}^*, \mathcal{S}_{2v}^*)$, $u, v = 1, 2$, is upper bounded by (see (34))

$$2^{n(R + (\mathbf{1}\{u=2\} + \mathbf{1}\{v=2\})\hat{R})} \tag{120}$$

because the same w_j is involved in both $\mathbf{x}_{1j}(w_j)$ and $\mathbf{x}_{2(j+1)}(w_j)$ where $\mathbf{1}\{\cdot\}$ is the indicator function. Similarly, the number of (w_j, l_{j-1}) that result in the same $\mathcal{S}_j = \mathcal{S}_{3u}^*$ is upper bounded by

$$2^{n(R + \mathbf{1}\{u=2\}\hat{R})}. \tag{121}$$

Finally, the number of l_{j-1} that result in the same $\mathcal{S}_j = \mathcal{S}_{42}^*$ is upper bounded by

$$2^{n\hat{R}}. \tag{122}$$

Hence, the number of $w^B \neq \mathbf{1}$ and l^B that result in the given $(\mathcal{S}_1, \ldots, \mathcal{S}_{B+1})_{\text{poss}}$ is upper bounded by (see (117))

$$\begin{aligned}
&2^{n\left((e_{11}+e_{12}+e_{21}+e_{22}+n_{31}+n_{32})R + (e_{12}+e_{21}+2e_{22}+n_{32}+n_{42})\hat{R}\right)} \\
&= 2^{n\left((n_{11}+n_{12}+n_{31}+n_{32})R + (e_{12}+e_{21}+2e_{22}+n_{32}+n_{42})\hat{R}\right)}.
\end{aligned} \tag{123}$$

We can bound (117) as follows

$$\begin{aligned}\sum_{j=1:\mathcal{S}_j\neq\emptyset}^{B+1} I_{\mathcal{S}_j} &\overset{(a)}{\geq} e_{11}I_{\mathcal{S}^*_{31}} + e_{12}I_{\mathcal{S}^*_{32}} + e_{21}I_{\mathcal{S}^*_{32}} \\ &\quad + e_{22}(I_{\mathcal{S}^*_{32}} + I_{\mathcal{S}^*_{42}}) + n_{31}I_{\mathcal{S}^*_{31}} + n_{32}I_{\mathcal{S}^*_{32}} + n_{42}I_{\mathcal{S}^*_{42}} \\ &= (n_{31}+e_{11})I_{\mathcal{S}^*_{31}} + (n_{11}+n_{12}+n_{32}-e_{11})I_{\mathcal{S}^*_{32}} \\ &\quad + (n_{42}+e_{22})I_{\mathcal{S}^*_{42}} \\ &\overset{(b)}{=} (n_{31}+e_{11})I_{\mathcal{S}^*_{31}} + (z-n_{31}-e_{11})I_{\mathcal{S}^*_{32}} \\ &\quad + (n_{42}+e_{22})I_{\mathcal{S}^*_{42}} \end{aligned} \tag{124}$$

where

(a) follows because

$$\begin{cases} I_{\mathcal{S}^*_{11}} + I_{\mathcal{S}^*_{21}} \geq I_{\mathcal{S}^*_{31}} \\ I_{\mathcal{S}^*_{11}} + I_{\mathcal{S}^*_{22}} \geq I_{\mathcal{S}^*_{32}} \\ I_{\mathcal{S}^*_{12}} + I_{\mathcal{S}^*_{21}} \geq I_{\mathcal{S}^*_{32}} \\ I_{\mathcal{S}^*_{12}} + I_{\mathcal{S}^*_{22}} \geq I_{\mathcal{S}^*_{32}} + I_{\mathcal{S}^*_{42}} \end{cases} \tag{125}$$

(b) follows by defining

$$z = n_{11} + n_{12} + n_{31} + n_{32}. \tag{126}$$

Combining (123) and (124), for a given $(\mathcal{S}_1,\ldots,\mathcal{S}_{B+1})_{\text{poss}}$ we have

$$\begin{aligned} &\sum_{\substack{w^B\neq\mathbf{1} \\ (\mathcal{S}_1,\ldots,\mathcal{S}_{B+1})=(\mathcal{S}_1,\ldots,\mathcal{S}_{B+1})_{\text{poss}}}} \sum_{l^B} 2^{-n\sum_{j=1:\mathcal{S}_j\neq\emptyset}^{B+1}(I_{\mathcal{S}_j}-\delta_{\epsilon_1}(n))} \\ &\leq 2^{n\left(zR+(z-n_{31}-e_{11}+n_{42}+e_{22})\hat{R}\right)} \\ &\cdot 2^{-n\left((n_{31}+e_{11})I_{\mathcal{S}^*_{31}}+(z-n_{31}-e_{11})I_{\mathcal{S}^*_{32}}+(n_{42}+e_{22})I_{\mathcal{S}^*_{42}}-\delta_{\epsilon_1}(n(B))\right)} \\ &= 2^{nz\left(R-\frac{(e_{11}+n_{31})}{z}I_{\mathcal{S}^*_{31}}-\frac{(z-e_{11}-n_{31})}{z}\left(I_{\mathcal{S}^*_{32}}-\hat{R}\right)\right)} \\ &\quad \cdot 2^{n(n_{42}+e_{22})\left(\hat{R}-I_{\mathcal{S}^*_{42}}\right)} \cdot 2^{n\delta_{\epsilon_1}(n(B))} \\ &\leq 2^{n\left[z\left(R-\min\left\{I_{\mathcal{S}^*_{31}},I_{\mathcal{S}^*_{32}}-\hat{R}\right\}\right)+(n_{42}+e_{22})\left(\hat{R}-I_{\mathcal{S}^*_{42}}\right)+\delta_{\epsilon_1}(n(B))\right]} \end{aligned} \tag{127}$$

which tends to zero as $n\to\infty$ as long as

$$R < \min\left\{I_{\mathcal{S}^*_{31}}, I_{\mathcal{S}^*_{32}} - \hat{R}\right\} \tag{128}$$

$$\hat{R} < I_{\mathcal{S}^*_{42}}. \tag{129}$$

Performing a Fourier-Motzkin elimination of $\hat{R}$, the error probability tends to zero as $n\to\infty$ as long as

$$\begin{aligned} R < \min&\left\{I(X_1X_2;\hat{Y}_3Y_4|X_3),\right. \\ &\left. I(X_1X_2X_3;Y_4) - I(\hat{Y}_3;Y_3|X_1X_2X_3Y_4)\right\} \end{aligned} \tag{130}$$

$$0 \leq I(X_3;Y_4|X_1X_2) - I(\hat{Y}_3;Y_3|X_1X_2X_3Y_4). \tag{131}$$

If (131) is violated, then the second term in (130) gives

$$R < I(X_1X_2;Y_4) \tag{132}$$

which is a stronger bound than the first bound in (130) and can be achieved with SNNC-DF by treating X_3 as noise. Thus we may ignore the constraint (131).

Summing over error probabilities associated with all $(\mathcal{S}_1,\ldots,\mathcal{S}_{B+1})_{\text{poss}}$ and combining (97) and (130), joint decoding achieves rates satisfying

$$\begin{aligned} R_{\text{SNNC-DF}} < \min&\left\{I(X_1;Y_2|X_2), I(X_1X_2;\hat{Y}_3Y_4|X_3),\right. \\ &\left. I(X_1X_2X_3;Y_4) - I(\hat{Y}_3;Y_3|X_1X_2X_3Y_4)\right\}. \end{aligned} \tag{133}$$

APPENDIX C
RATES AND OUTAGE FOR GAUSSIAN NETWORKS

In the following, let $C(x) = \log_2(1+x)$, $x \geq 0$.

A. Relay Channels

1) No Fading: The achievable rates R with DF and CF-S are given in [9]. The SNNC and NNC rates are simply the CF-S rate. The SNNC-DF rate is the larger of the SNNC and DF rates.

2) Slow Rayleigh Fading: Define the events

$$\begin{aligned} D_{\text{DF}} &= \left\{R_{\text{tar}} < C\left(|G_{12}|^2P_1(1-|\beta|^2)\right)\right\} \\ D_{\text{CF-S1}} &= \left\{R_{2(\text{bin})} < C\left(\frac{|G_{23}|^2P_2}{1+|G_{13}|^2P_1}\right)\right\} \\ D_{\text{CF-S2}} &= \left\{R_{2(\text{bin})} \geq C\left(\frac{1}{\hat{\sigma}_2^2} + \frac{|G_{12}|^2P_1}{\hat{\sigma}_2^2(1+|G_{13}|^2P_1)}\right)\right\} \\ D_{\text{SNNC}} &= \left\{\hat{\sigma}_2^2 \geq \frac{1}{|G_{23}|^2P_2}\right\} \end{aligned} \tag{134}$$

where $|\beta|^2$ is the fraction of power allocated by source 1 to sending new messages. The optimal β, $R_{2(\text{bin})}$ and $\hat{\sigma}_2^2$ are calculated numerically.

The DF, CF-S, SNNC and SNNC-DF rates are

$$\begin{aligned} R_{\text{DF}} &= a_1 \\ R_{\text{CF-S}} &= b_1 \\ R_{\text{SNNC}} &= c_1 \\ R_{\text{SNNC-DF}} &= \begin{cases} R_{\text{DF}} & \text{if } D_{\text{DF}} \text{ occurs} \\ R_{\text{SNNC}} & \text{otherwise} \end{cases} \end{aligned} \tag{135}$$

where

$$a_1 = \min\left\{C\left(|G_{12}|^2P_1(1-|\beta|^2)\right),\right. \\ \left. C\left(|G_{13}|^2P_1 + |G_{23}|^2P_2 + 2\Re\{\beta G_{13}G_{23}^*\}\sqrt{P_1P_2}\right)\right\}$$

$$b_1 = \begin{cases} C\left(\frac{|G_{12}|^2P_1}{1+\hat{\sigma}_2^2} + |G_{13}|^2P_1\right) & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}} \\ C\left(|G_{13}|^2P_1\right) & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}}^{\text{c}} \\ C\left(\frac{|G_{13}|^2P_1}{1+|G_{23}|^2P_2}\right) & \text{otherwise} \end{cases}$$

$$c_1 = \begin{cases} \min\left\{C\left(|G_{13}|^2P_1 + |G_{23}|^2P_2\right) - C(\frac{1}{\hat{\sigma}_2^2}),\right. & \\ \left. C\left(\frac{|G_{12}|^2P_1}{1+\hat{\sigma}_2^2} + |G_{13}|^2P_1\right)\right\} & \text{if } D_{\text{SNNC}} \\ C\left(\frac{|G_{13}|^2P_1}{1+|G_{23}|^2P_2}\right) & \text{otherwise} \end{cases} \tag{136}$$

and $\Re\{x\}$ is the real part of x and x^* is the complex conjugate of x.

Remark 6: For SNNC, event D_{SNNC} means that

$$I(X_2;Y_3|X_1) - I(\hat{Y}_2;Y_2|X_1X_2Y_3) \geq 0 \tag{137}$$

and the destination can reliably recover X_2 and $\hat{Y}_2$ *jointly* which helps to decode X_1. Otherwise the destination should treat X_2 as noise to get a better rate (see Theorem 1). Similarly, for CF-S the events $D_{\text{CF-S1}}$ and $D_{\text{CF-S2}}$ mean that both X_2 and $\hat{Y}_2$ can be decoded in a *step-by-step* fashion [19]. If $D_{\text{CF-S1}}$ and $D^{\text{c}}_{\text{CF-S2}}$ occur, then X_2 can be recovered which removes interference at the receiver. Otherwise the relay signal should be treated as noise.

As recognized in [20], one drawback of DF is that if the source-relay link happens to be weak and the relay tries to decode, then the rate suffers. Hence the relay should decode only if the source-relay link is strong enough to support R_{tar}, i.e., if event D_{DF} occurs. Otherwise, the relay should perform CF-S or QF. Different choices of relay operations depending on the channel conditions lead to the achievable rates with SNNC-DF.

The outage probabilities are as follows:

$$\begin{aligned} P^{\text{out}}_{\text{DF}} &= \Pr[R_{\text{DF}} < R_{\text{tar}}] \\ P^{\text{out}}_{\text{CF-S}} &= \Pr[R_{\text{CF-S}} < R_{\text{tar}}] \\ P^{\text{out}}_{\text{SNNC}} &= \Pr[R_{\text{SNNC}} < R_{\text{tar}}] \\ P^{\text{out}}_{\text{SNNC-DF}} &= \Pr[R_{\text{SNNC-DF}} < R_{\text{tar}}] \end{aligned} \tag{138}$$

B. Two-Relay Channels

1) No Fading: The achievable DF rates are [9, Theorem 1]

$$R_{\text{DF}} < \max\ \{R_{\text{DF1}}, R_{\text{DF2}}\} \tag{139}$$

where

$$\begin{aligned} R_{\text{DF1}} &= \min\ \{a_{21}, a_{22}, a_{23}\} \\ R_{\text{DF2}} &= \min\ \{b_{21}, b_{22}, b_{23}\} \end{aligned} \tag{140}$$

with

$$\begin{aligned} a_{21} &= C\left(|\beta_1|^2|G_{12}|^2P_1\right) \\ a_{22} &= C\Big((1-|\beta_3|^2)|G_{13}|^2P_1 + |\gamma_1|^2|G_{23}|^2P_2 \\ &\qquad +2\Re\{\beta_2G_{13}(\gamma_1G_{23})^*\}\sqrt{P_1P_2}\Big) \\ a_{23} &= C\Big(|G_{14}|^2P_1 + |G_{24}|^2P_2 + |G_{34}|^2P_3 \\ &\quad + \left(2\Re\{\beta_2G_{14}(\gamma_1G_{24})^*\} + 2\Re\{\beta_3G_{14}(\gamma_2G_{24})^*\}\right)\sqrt{P_1P_2} \\ &\quad +2\Re\{\beta_3G_{14}G^*_{34}\}\sqrt{P_1P_3} + 2\Re\{\gamma_2G_{24}G^*_{34}\}\sqrt{P_2P_3}\Big) \\ b_{21} &= C\left(|\beta_1|^2|G_{13}|^2P_1\right) \\ b_{22} &= C\Big((1-|\beta_3|^2)|G_{12}|^2P_1 + |\gamma_1|^2|G_{32}|^2P_3 \\ &\qquad +2\Re\{\beta_2G_{12}(\gamma_1G_{32})^*\}\sqrt{P_1P_3}\Big) \\ b_{23} &= C\Big(|G_{14}|^2P_1 + |G_{24}|^2P_2 + |G_{34}|^2P_3 \\ &\quad + \left(2\Re\{\beta_2G_{14}(\gamma_1G_{34})^*\} + 2\Re\{\beta_3G_{14}(\gamma_2G_{34})^*\}\right)\sqrt{P_1P_3} \\ &\quad +2\Re\{\beta_2G_{14}G^*_{24}\}\sqrt{P_1P_2} + 2\Re\{\gamma_1G_{24}G^*_{34}\}\sqrt{P_2P_3}\Big) \end{aligned} \tag{141}$$

where $\sum_{i=1}^{3}|\beta_i|^2 = 1$ and $\sum_{i=1}^{2}|\gamma_i|^2 = 1$ and the optimal power allocation parameters are calculated numerically.

The CF-S rates are (see [9, Theorem 2] with $U_i = 0$, $i = 2, 3$)

$$R_{\text{CF-S}} < c_{21} \tag{142}$$

subject to

$$g_2 \le d_2,\ h_2 \le e_2,\ i_2 \le f_2$$

where

$$\begin{aligned} c_{21} &= C\left(\frac{|G_{12}|^2P_1}{1+\hat{\sigma}_2^2} + \frac{|G_{13}|^2P_1}{1+\hat{\sigma}_3^2} + |G_{14}|^2P_1\right) \\ d_2 &= C\left(\frac{|G_{24}|^2P_2}{1+|G_{14}|^2P_1}\right) \\ e_2 &= C\left(\frac{|G_{34}|^2P_3}{1+|G_{14}|^2P_1}\right) \\ f_2 &= C\left(\frac{|G_{24}|^2P_2 + |G_{34}|^2P_3}{1+|G_{14}|^2P_1}\right) \\ g_2 &= C\left(\frac{1}{\hat{\sigma}_2^2} + \frac{|G_{12}|^2P_1}{\hat{\sigma}_2^2(1+\frac{|G_{13}|^2P_1}{(1+\hat{\sigma}_3^2)} + |G_{14}|^2P_1)}\right) \\ h_2 &= C\left(\frac{1}{\hat{\sigma}_3^2} + \frac{|G_{13}|^2P_1}{\hat{\sigma}_3^2(1+\frac{|G_{12}|^2P_1}{1+\hat{\sigma}_2^2} + |G_{14}|^2P_1)}\right) \\ i_2 &= C\Bigg(\frac{1+\hat{\sigma}_2^2+\hat{\sigma}_3^2}{\hat{\sigma}_2^2\hat{\sigma}_3^2} \\ &\qquad + \frac{|G_{12}|^2P_1(1+\hat{\sigma}_3^2) + |G_{13}|^2P_1(1+\hat{\sigma}_2^2)}{\hat{\sigma}_2^2\hat{\sigma}_3^2(1+|G_{14}|^2P_1)}\Bigg). \end{aligned} \tag{143}$$

The optimal $\hat{\sigma}_2^2$ and $\hat{\sigma}_3^2$ are calculated numerically.

Referring to Theorem 1, the achievable SNNC rates are

$$R_{\text{SNNC}} < \min\ \{c_{21}, j_{21}, j_{22}, j_{23}\} \tag{144}$$

where

$$\begin{aligned} j_{21} &= C\Bigg(|G_{14}|^2P_1 + |G_{24}|^2P_2 + \frac{|G_{13}|^2P_1 + |G_{23}|^2P_2}{1+\hat{\sigma}_3^2} \\ &\qquad + \frac{P_1P_2(|G_{13}|^2|G_{24}|^2 + |G_{14}|^2|G_{23}|^2)}{1+\hat{\sigma}_3^2} \\ &\qquad - \frac{2\Re\{G_{13}G_{24}G^*_{14}G^*_{23}\}P_1P_2}{1+\hat{\sigma}_3^2}\Bigg) - C\left(\frac{1}{\hat{\sigma}_2^2}\right) \\ j_{22} &= C\Bigg(|G_{14}|^2P_1 + |G_{34}|^2P_3 + \frac{|G_{12}|^2P_1 + |G_{32}|^2P_3}{1+\hat{\sigma}_3^2} \\ &\qquad + \frac{P_1P_3(|G_{12}|^2|G_{34}|^2 + |G_{14}|^2|G_{32}|^2)}{(1+\hat{\sigma}_2^2)} \\ &\qquad - \frac{2\Re\left\{G_{12}G_{34}G^*_{14}G^*_{32}\right\}P_1P_3}{(1+\hat{\sigma}_2^2)}\Bigg) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \\ j_{23} &= C\left(|G_{14}|^2P_1 + |G_{24}|^2P_2 + |G_{34}|^2P_3\right) \\ &\quad - C\left(\frac{1+\hat{\sigma}_2^2+\hat{\sigma}_3^2}{\hat{\sigma}_2^2\hat{\sigma}_3^2}\right). \end{aligned} \tag{145}$$

where c_{21} is defined in (143). The optimal $\hat{\sigma}_2^2$ and $\hat{\sigma}_3^2$ are calculated numerically.

If one relay uses DF and the other uses QF, rates satisfying

$$R_{\text{DQF}} < \max\ \{R_{\text{DQF1}}, R_{\text{DQF2}}\} \tag{146}$$

can be achieved, where

$$\begin{aligned} R_{\text{DQF1}} &= \min\ \{k_{21}, k_{22}, k_{23}\} \\ R_{\text{DQF2}} &= \min\ \{l_{21}, l_{22}, l_{23}\} \end{aligned}$$

with

$$
\begin{aligned}
k_{21} &= C\left(\frac{|G_{12}|^2P_1(1-|\theta|^2)}{1+|G_{32}|^2P_3}\right)\\
k_{22} &= C\Bigg(|G_{14}|^2P_1+|G_{24}|^2P_2+2\Re\{\theta G_{14}G_{24}^*\}\sqrt{P_1P_2}\\
&\quad+\frac{|G_{13}|^2P_1+|G_{23}|^2P_2+2\Re\{\theta G_{13}G_{23}^*\}\sqrt{P_1P_2}}{1+\hat{\sigma}_3^2}\\
&\quad+\frac{(1-|\theta|^2)P_1P_2(|G_{13}|^2|G_{24}|^2+|G_{14}|^2|G_{23}|^2)}{1+\hat{\sigma}_3^2}\\
&\quad-\frac{(1-|\theta|^2)P_1P_2\cdot 2\Re\{G_{13}G_{24}G_{14}^*G_{23}^*\})}{1+\hat{\sigma}_3^2}\Bigg)\\
k_{23} &= C\big(|G_{14}|^2P_1+|G_{24}|^2P_2+|G_{34}|^2P_3\\
&\qquad+2\Re\{\theta G_{14}G_{24}^*\}\sqrt{P_1P_2}\big)-C\left(\frac{1}{\hat{\sigma}_3^2}\right)
\end{aligned}
\tag{147}
$$

and

$$
\begin{aligned}
l_{21} &= C\left(\frac{|G_{13}|^2P_1(1-|\theta|^2)}{1+|G_{23}|^2P_2}\right)\\
l_{22} &= C\Bigg(|G_{14}|^2P_1+|G_{34}|^2P_3+2\Re\{\theta G_{14}G_{34}^*\}\sqrt{P_1P_3}\\
&\quad+\frac{|G_{12}|^2P_1+|G_{32}|^2P_3+2\Re\{\theta G_{12}G_{32}^*\}\sqrt{P_1P_3}}{1+\hat{\sigma}_2^2}\\
&\quad+\frac{(1-|\theta|^2)P_1P_3(|G_{12}|^2|G_{34}|^2+|G_{14}|^2|G_{32}|^2)}{1+\hat{\sigma}_2^2}\\
&\quad-\frac{(1-|\theta|^2)P_1P_3\cdot 2\Re\{G_{12}G_{34}G_{14}^*G_{32}^*\})}{1+\hat{\sigma}_2^2}\Bigg)\\
l_{23} &= C\big(|G_{14}|^2P_1+|G_{24}|^2P_2+|G_{34}|^2P_3\\
&\qquad+2\Re\{\theta G_{14}G_{34}^*\}\sqrt{P_1P_3}\big)-C\left(\frac{1}{\hat{\sigma}_2^2}\right)
\end{aligned}
\tag{148}
$$

where $0 \le |\theta|^2 \le 1$ and the optimal θ, $\hat{\sigma}_2^2$ and $\hat{\sigma}_3^2$ for R_{DQF1} and R_{DQF2} are calculated numerically.

Referring to Theorem 2, SNNC-DF achieves rates satisfying

$$R_{\text{SNNC-DF}} < \max\{R_{\text{DF}}, R_{\text{DQF}}, R_{\text{SNNC}}\}. \tag{149}$$

2) Slow Rayleigh Fading: Define the events

$$
\begin{aligned}
D_{\text{DFV}} &= \left\{\begin{array}{l} R_{\text{tar}} < V_{21}\\ R_{\text{tar}} < V_{22}\end{array}\right\}\\
D_{\text{DF1}} &= \{\ R_{\text{tar}} < k_{21}\}\\
D_{\text{DF2}} &= \{\ R_{\text{tar}} < l_{21}\}\\
D_{\text{CF-S1}} &= \left\{\begin{array}{l} R_{2(\text{bin})} < d_2\\ R_{3(\text{bin})} < e_2\\ R_{2(\text{bin})}+R_{3(\text{bin})} < f_2\end{array}\right\}\\
D_{\text{CF-S2}} &= \left\{\begin{array}{l} R_{2(\text{bin})} \ge g_2\\ R_{3(\text{bin})} \ge h_2\\ R_{2(\text{bin})}+R_{3(\text{bin})} \ge i_2\end{array}\right\}\\
D_{\text{SNNC1}} &= \left\{\begin{array}{l} |G_{24}|^2P_2+\frac{|G_{23}|^2P_2}{1+\hat{\sigma}_3^2} \ge \frac{1}{\hat{\sigma}_2^2}\\ |G_{34}|^2P_3+\frac{|G_{32}|^2P_3}{1+\hat{\sigma}_2^2} \ge \frac{1}{\hat{\sigma}_3^2}\\ |G_{24}|^2P_2+|G_{34}|^2P_3 \ge \frac{1}{\hat{\sigma}_2^2}+\frac{1}{\hat{\sigma}_3^2}+\frac{1}{\hat{\sigma}_2^2\hat{\sigma}_3^2}\end{array}\right\}\\
D_{\text{SNNC2}} &= \left\{\hat{\sigma}_2^2 \ge \frac{1+|G_{32}|^2P_3+|G_{34}|^2P_3}{|G_{24}|^2P_2}\right\}\\
D_{\text{SNNC3}} &= \left\{\hat{\sigma}_3^2 \ge \frac{1+|G_{23}|^2P_2+|G_{24}|^2P_2}{|G_{34}|^2P_3}\right\}
\end{aligned}
\tag{150}
$$

where $\{V_{21}, V_{22}, V_{23}\}$ takes on the value $\{a_{21}, a_{22}, a_{23}\}$ or $\{b_{21}, b_{22}, b_{23}\}$ (see (141)) and the choice depends on the statistics of the fading coefficients such that the DF outage probability is minimized.

The DF rates are

$$R_{\text{DF}} = \min\ \{V_{21}, V_{22}, V_{23}\}. \tag{151}$$

The CF-S rates are

$$
R_{\text{CF-S}} = \begin{cases} c_{21} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}}\\ c_{22} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}}^{\text{c}}\\ c_{23} & \text{otherwise}\end{cases}
\tag{152}
$$

where c_{21} is defined in (143) and

$$
\begin{aligned}
c_{22} &= C\left(|G_{14}|^2P_1\right)\\
c_{23} &= C\left(\frac{|G_{14}|^2P_1}{1+|G_{24}|^2P_2+|G_{34}|^2P_3}\right).
\end{aligned}
\tag{153}
$$

Observe that if both $D_{\text{CF-S1}}$ and $D_{\text{CF-S2}}$ occur, then both the bin and quantization indices can be decoded. If only $D_{\text{CF-S1}}$ occurs, then only the bin index can be recovered.

Referring to Theorem 1 the SNNC rates are

$$
R_{\text{SNNC}} = \begin{cases} \min\ \{c_{21}, j_{21}, j_{22}, j_{23}\} & \text{if } D_{\text{SNNC1}}\\ \min\ \{m_{21}, m_{22}\} & \text{if } D_{\text{SNNC1}}^{\text{c}} \cap D_{\text{SNNC2}}\\ \min\ \{q_{21}, q_{22}\} & \text{if } D_{\text{SNNC1}}^{\text{c}} \cap D_{\text{SNNC3}}\\ c_{23} & \text{otherwise}\end{cases}
\tag{154}
$$

where

$$
\begin{aligned}
m_{21} &= C\Bigg(\frac{P_1(|G_{12}|^2+(1+\hat{\sigma}_2^2)|G_{14}|^2)+P_1P_3|G_{14}|^2|G_{32}|^2}{|G_{32}|^2P_3+(1+\hat{\sigma}_2^2)\,(1+|G_{34}|^2P_3)}\\
&\qquad+\frac{P_1P_3(|G_{12}|^2|G_{34}|^2-2\Re\{G_{12}G_{34}G_{14}^*G_{32}^*\})}{|G_{32}|^2P_3+(1+\hat{\sigma}_2^2)\,(1+|G_{34}|^2P_3)}\Bigg)\\
m_{22} &= C\left(\frac{|G_{14}|^2P_1+|G_{24}|^2P_2}{1+|G_{34}|^2P_3}\right)\\
&\qquad-C\left(\frac{1}{\hat{\sigma}_2^2}+\frac{|G_{32}|^2P_3}{\hat{\sigma}_2^2\,(1+|G_{34}|^2P_3)}\right)\\
q_{21} &= C\Bigg(\frac{P_1(|G_{13}|^2+(1+\hat{\sigma}_3^2)|G_{14}|^2)+P_1P_2|G_{14}|^2|G_{23}|^2}{|G_{23}|^2P_2+(1+\hat{\sigma}_3^2)\,(1+|G_{24}|^2P_2)}\\
&\qquad+\frac{P_1P_2(|G_{13}|^2|G_{24}|^2-2\Re\{G_{13}G_{24}G_{14}^*G_{23}^*\})}{|G_{23}|^2P_2+(1+\hat{\sigma}_3^2)\,(1+|G_{24}|^2P_2)}\Bigg)\\
q_{22} &= C\left(\frac{|G_{14}|^2P_1+|G_{34}|^2P_3}{1+|G_{24}|^2P_2}\right)\\
&\qquad-C\left(\frac{1}{\hat{\sigma}_3^2}+\frac{|G_{23}|^2P_2}{\hat{\sigma}_3^2\,(1+|G_{24}|^2P_2)}\right).
\end{aligned}
\tag{155}
$$

The event D_{SNNC1} means that both quantization indices can be recovered. The events D_{SNNC2} and D_{SNNC3} mean that only one of the two quantization indices can be decoded.

The SNNC-DF rates are

$$
R_{\text{SNNC-DF}} = \begin{cases} R_{\text{DF}} & \text{if } D_{\text{DFV}}\\ R_{\text{DQF1}} & \text{if } D_{\text{DFV}}^{\text{c}} \cap D_{\text{DF1}}\\ R_{\text{DQF2}} & \text{if } D_{\text{DFV}}^{\text{c}} \cap D_{\text{DF2}}\\ R_{\text{SNNC}} & \text{otherwise}\end{cases}
\tag{156}
$$

where (see (147) and (148))

$$
\begin{aligned}
R_{\text{DQF1}} &= \min\ \{k_{21}, k_{22}, k_{23}\}\\
R_{\text{DQF2}} &= \min\ \{l_{21}, l_{22}, l_{23}\}.
\end{aligned}
$$

The outage probabilities are as in (138).

C. *Multiple Access Relay Channels*

1) No Fading: The DF rate region of the Gaussian MARC is the union of all pairs (R_1, R_2) satisfying [21, Sec. 3]

$$\begin{aligned} R_1 &< R_{\text{DF1}} = \min\ \{a_{31}, a_{32}\} \\ R_2 &< R_{\text{DF2}} = \min\ \{b_{31}, b_{32}\} \\ R_1 + R_2 &< R_{\text{DF3}} = \min\ \{c_{31}, c_{32}\} \end{aligned} \tag{157}$$

where

$$\begin{aligned} a_{31} &= C\left(|G_{13}|^2 P_1 (1-|\beta|^2)\right) \\ a_{32} &= C\Big(|G_{14}|^2 P_1 + |G_{34}|^2 P_3 \\ &\qquad + 2\Re\{\beta G_{14}(\theta_1 G_{34})^*\}\sqrt{P_1 P_3}\Big) \\ b_{31} &= C\left(|G_{23}|^2 P_2 (1-|\gamma|^2)\right) \\ b_{32} &= C\Big(|G_{24}|^2 P_2 + |G_{34}|^2 P_3 \\ &\qquad + 2\Re\{\gamma G_{24}(\theta_2 G_{34})^*\}\sqrt{P_2 P_3}\Big) \\ c_{31} &= C\left(|G_{13}|^2 P_1 (1-|\beta|^2) + |G_{23}|^2 P_2 (1-|\gamma|^2)\right) \\ c_{32} &= C\Big(|G_{14}|^2 P_1 + |G_{24}|^2 P_2 + |G_{34}|^2 P_3 \\ &\qquad + 2\Re\{\beta G_{14}(\theta_1 G_{34})^*\}\sqrt{P_1 P_3} \\ &\qquad + 2\Re\{\gamma G_{24}(\theta_2 G_{34})^*\}\sqrt{P_2 P_3}\Big) \end{aligned} \tag{158}$$

where $0 \le |\beta|^2, |\gamma|^2 \le 1$ and $\sum_{i=1}^{2} |\theta_i|^2 = 1$. The optimal power allocation parameters are calculated numerically.

The achievable CF-S rate region is the union of all pairs (R_1, R_2) satisfying [21, Sec. 3]

$$\begin{aligned} R_1 &< d_{31} \\ R_2 &< e_{31} \\ R_1 + R_2 &< f_{31} \end{aligned} \tag{159}$$

where

$$\begin{aligned} d_{31} &= C\left(\frac{|G_{13}|^2 P_1}{1+\hat{\sigma}_3^2} + |G_{14}|^2 P_1\right) \\ e_{31} &= C\left(\frac{|G_{23}|^2 P_2}{1+\hat{\sigma}_3^2} + |G_{24}|^2 P_2\right) \\ f_{31} &= C\Bigg(|G_{14}|^2 P_1 + |G_{24}|^2 P_2 + \frac{|G_{13}|^2 P_1 + |G_{23}|^2 P_2}{1+\hat{\sigma}_3^2} \\ &\quad + \frac{P_1 P_2 (|G_{13}|^2 |G_{24}|^2 + |G_{14}|^2 |G_{23}|^2 - 2\Re\{G_{13} G_{24} G_{14}^* G_{23}^*\})}{1+\hat{\sigma}_3^2}\Bigg) \end{aligned} \tag{160}$$

for some

$$\begin{aligned} \hat{\sigma}_3^2 &\ge \frac{1 + (|G_{13}|^2 + |G_{14}|^2) P_1 + (|G_{23}|^2 + |G_{24}|^2) P_2}{|G_{34}|^2 P_3} \\ &+ \frac{P_1 P_2 (|G_{13}|^2 |G_{24}|^2 + |G_{14}|^2 |G_{23}|^2 - 2\Re\{G_{13} G_{24} G_{14}^* G_{23}^*\})}{|G_{34}|^2 P_3}. \end{aligned}$$

Referring to Theorem 1, the SNNC rate region is the union of all pairs (R_1, R_2) satisfying

$$\begin{aligned} R_1 &< \min\ \{d_{31}, g_{31}\} \\ R_2 &< \min\ \{e_{31}, h_{31}\} \\ R_1 + R_2 &< \min\ \{f_{31}, i_{31}\} \end{aligned} \tag{161}$$

where d_{31}, e_{31} and f_{31} are defined in (160) and

$$\begin{aligned} g_{31} &= C\left(|G_{14}|^2 P_1 + |G_{34}|^2 P_3\right) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \\ h_{31} &= C\left(|G_{24}|^2 P_2 + |G_{34}|^2 P_3\right) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \\ i_{31} &= C\left(|G_{14}|^2 P_1 + |G_{24}|^2 P_2 + |G_{34}|^2 P_3\right) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \end{aligned}$$

for some $\hat{\sigma}_3^2 > \frac{1}{|G_{34}|^2 P_3}$. The SNNC-DF rate region is the union of the SNNC and DF rate regions.

2) Slow Rayleigh Fading: Define the events

$$\begin{aligned} D_{\text{DF}} &= \left\{ \begin{array}{l} R_{\text{tar1}} < a_{31} \\ R_{\text{tar2}} < b_{31} \\ R_{\text{tar1}} + R_{\text{tar2}} < c_{31} \end{array} \right\} \\ D_{\text{CF-S1}} &= \left\{ R_{3(\text{bin})} < C\left(\frac{|G_{34}|^2 P_3}{1 + |G_{14}|^2 P_1 + |G_{24}|^2 P_2}\right)\right\} \\ D_{\text{CF-S2}} &= \Bigg\{ R_{3(\text{bin})} \ge C\Bigg(\frac{1}{\hat{\sigma}_3^2} + \frac{|G_{13}|^2 P_1 + |G_{23}|^2 P_2}{\hat{\sigma}_3^2 \left(1 + |G_{14}|^2 P_1 + |G_{24}|^2 P_2\right)} \\ &\qquad + \frac{P_1 P_2 (|G_{13}|^2 |G_{24}|^2 + |G_{14}|^2 |G_{23}|^2)}{\hat{\sigma}_3^2 \left(1 + |G_{14}|^2 P_1 + |G_{24}|^2 P_2\right)} \\ &\qquad - \frac{P_1 P_2 \cdot 2\Re\{G_{13} G_{24} G_{14}^* G_{23}^*\}}{\hat{\sigma}_3^2 \left(1 + |G_{14}|^2 P_1 + |G_{24}|^2 P_2\right)}\Bigg)\Bigg\} \\ D_{\text{SNNC}} &= \left\{ \hat{\sigma}_3^2 \ge \frac{1}{|G_{34}|^2 P_3} \right\}. \end{aligned} \tag{162}$$

The DF rate region of the Gaussian MARC is the union of all rate pairs (R_1, R_2) satisfying (157). The CF-S rate region is the union of all (R_1, R_2) satisfying [21]

$$R_1 < R_{\text{CF1}} = \begin{cases} d_{31} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}} \\ d_{32} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}}^{\text{c}} \\ d_{33} & \text{otherwise} \end{cases} \tag{163}$$

$$R_2 < R_{\text{CF2}} = \begin{cases} e_{31} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}} \\ e_{32} & \text{if } D_{\text{CF-S1}} \cap D_{\text{CF-S2}}^{\text{c}} \\ e_{33} & \text{otherwise} \end{cases} \tag{164}$$

$$R_1 + R_2 < R_{\text{CF3}} = \begin{cases} f_{31} & \text{if } D_{\text{CF-S}_1} \cap D_{\text{CF-S2}} \\ f_{32} & \text{if } D_{\text{CF-S}_1} \cap D_{\text{CF-S2}}^{\text{c}} \\ f_{33} & \text{otherwise} \end{cases} \tag{165}$$

where

$$\begin{aligned} d_{32} &= C\left(|G_{14}|^2 P_1\right) \\ d_{33} &= C\left(\frac{|G_{14}|^2 P_1}{1 + |G_{34}|^2 P_3}\right) \\ e_{32} &= C\left(|G_{24}|^2 P_2\right) \\ e_{33} &= C\left(\frac{|G_{24}|^2 P_2}{1 + |G_{34}|^2 P_3}\right) \\ f_{32} &= C\left(|G_{14}|^2 P_1 + |G_{24}|^2 P_2\right) \\ f_{33} &= C\left(\frac{|G_{14}|^2 P_1 + |G_{24}|^2 P_2}{1 + |G_{34}|^2 P_3}\right). \end{aligned} \tag{166}$$

If both $D_{\text{CF-S1}}$ and $D_{\text{CF-S2}}$ occur, then the relay bin and quantization indices can be decoded. If only $D_{\text{CF-S1}}$ occurs, then only the bin index can be recovered.

Referring to Theorem 1, the SNNC rate region is the union of all pairs (R_1, R_2) satisfying

$$\begin{aligned} R_1 < R_{\text{SNNC1}} &= \begin{cases} \min\{d_{31}, g_{31}\} & \text{if } D_{\text{SNNC}} \\ d_{33} & \text{otherwise} \end{cases} \\ R_2 < R_{\text{SNNC2}} &= \begin{cases} \min\{e_{31}, h_{31}\} & \text{if } D_{\text{SNNC}} \\ e_{33} & \text{otherwise} \end{cases} \\ R_1 + R_2 < R_{\text{SNNC3}} &= \begin{cases} \min\{f_{31}, i_{31}\} & \text{if } D_{\text{SNNC}} \\ f_{33} & \text{otherwise.} \end{cases} \end{aligned} \tag{167}$$

The event D_{SNNC} means that the destination should decode the relay signal to achieve better performance.

The SNNC-DF rate region is the union of all (R_1, R_2) satisfying

$$\begin{aligned} R_1 < R_{\text{SNNC-DF1}} &= \begin{cases} R_{\text{DF1}} & \text{if} \quad D_{\text{DF}} \\ R_{\text{SNNC1}} & \text{otherwise} \end{cases} \\ R_2 < R_{\text{SNNC-DF2}} &= \begin{cases} R_{\text{DF2}} & \text{if} \quad D_{\text{DF}} \\ R_{\text{SNNC2}} & \text{otherwise} \end{cases} \\ R_1 + R_2 < R_{\text{SNNC-DF3}} &= \begin{cases} R_{\text{DF3}} & \text{if} \quad D_{\text{DF}} \\ R_{\text{SNNC3}} & \text{otherwise.} \end{cases} \end{aligned} \tag{168}$$

If D_{DF} occurs, then the relay should decode which will remove interference at the relay. Otherwise, the relay should perform QF to avoid unnecessarily lowering the rates.

Let $R_{\text{tar3}} = R_{\text{tar1}} + R_{\text{tar2}}$. The outage probabilities are:

$$\begin{aligned} P_{\text{DF}}^{\text{out}} &= \Pr[\{R_{\text{DF1}} < R_{\text{tar1}}\} \cup \{R_{\text{DF}_2} < R_{\text{tar2}}\} \cup \{R_{\text{DF}_3} < R_{\text{tar3}}\}] \\ P_{\text{CF-S}}^{\text{out}} &= \Pr[\{R_{\text{CF-S1}} < R_{\text{tar1}}\} \cup \{R_{\text{CF-S2}} < R_{\text{tar2}}\} \\ &\qquad \cup \{R_{\text{CF-S}} < R_{\text{tar3}}\}] \\ P_{\text{SNNC}}^{\text{out}} &= \Pr[\{R_{\text{SNNC1}} < R_{\text{tar1}}\} \cup \{R_{\text{SNNC2}} < R_{\text{tar2}}\} \\ &\qquad \cup \{R_{\text{SNNC3}} < R_{\text{tar3}}\}] \\ P_{\text{SNNC-DF}}^{\text{out}} &= \Pr[\{R_{\text{SNNC-DF1}} < R_{\text{tar1}}\} \cup \{R_{\text{SNNC-DF2}} < R_{\text{tar2}}\} \\ &\qquad \cup \{R_{\text{SNNC-DF3}} < R_{\text{tar3}}\}] \end{aligned} \tag{169}$$

D. Two-Way Relay Channels

1) No Fading: The DF rate region for the Gaussian TWRC is the union of all (R_1, R_2) satisfying

$$\begin{aligned} R_1 &< R_{\text{DF1}} = \min\ \{a_{41}, a_{42}\} \\ R_2 &< R_{\text{DF2}} = \min\ \{b_{41}, b_{42}\} \\ R_1 + R_2 &< R_{\text{DF3}} = c_{41} \end{aligned} \tag{170}$$

where

$$\begin{aligned} a_{41} &= C\left(|G_{13}|^2 P_1 (1 - |\beta|^2)\right) \\ a_{42} &= C\Big(|G_{12}|^2 P_1 + |G_{32}|^2 P_3 (1 - |\theta_1|^2) \\ &\qquad + 2\Re\{\beta G_{12} (\theta_1 G_{32})^*\} \sqrt{P_1 P_3}\Big) \\ b_{41} &= C\left(|G_{23}|^2 P_2 (1 - |\gamma|^2)\right) \\ b_{42} &= C\Big(|G_{21}|^2 P_2 + |G_{31}|^2 P_3 (1 - |\theta_1|^2) \\ &\qquad + 2\Re\{\gamma G_{21} (\theta_2 G_{31})^*\} \sqrt{P_2 P_3}\Big) \\ c_{41} &= C\left(|G_{13}|^2 P_1 (1 - |\beta|^2) + |G_{23}|^2 P_2 (1 - |\gamma|^2)\right) \end{aligned} \tag{171}$$

where $0 \leq |\beta|^2, |\gamma|^2 \leq 1$ and $\sum_{i=1}^{2} |\theta_i|^2 = 1$. The optimal power allocation parameters are calculated numerically.

The CF-S rate region [22, Proposition 4] is the union of all (R_1, R_2) satisfying

$$\begin{aligned} R_1 &< d_{41} \\ R_2 &< e_{41} \end{aligned} \tag{172}$$

where

$$\begin{aligned} d_{41} &= C\left(|G_{12}|^2 P_1 + \frac{|G_{13}|^2 P_1}{1 + \hat{\sigma}_3^2}\right) \\ e_{41} &= C\left(|G_{21}|^2 P_2 + \frac{|G_{23}|^2 P_2}{1 + \hat{\sigma}_3^2}\right) \end{aligned}$$

for some

$$\hat{\sigma}_3^2 \geq \max\ \{f_{41}, f_{42}, f_{43}, f_{44}\}$$

where

$$\begin{aligned} f_{41} &= \frac{1 + |G_{12}|^2 P_1 + |G_{13}|^2 P_1}{|G_{32}|^2 P_3} \\ f_{42} &= \frac{|G_{21}|^2 P_2 + 1}{|G_{31}|^2 P_3} + \frac{|G_{13}|^2 P_1 (|G_{21}|^2 P_2 + 1)}{|G_{31}|^2 P_3 (|G_{12}|^2 P_1 + 1)} \\ f_{43} &= \frac{1 + |G_{21}|^2 P_2 + |G_{23}|^2 P_2}{|G_{31}|^2 P_3}, \\ f_{44} &= \frac{|G_{12}|^2 P_1 + 1}{|G_{32}|^2 P_3} + \frac{|G_{23}|^2 P_2 (|G_{12}|^2 P_1 + 1)}{|G_{32}|^2 P_3 (|G_{21}|^2 P_2 + 1)}. \end{aligned}$$

Referring to Theorem 1, the SNNC rate region is the union of all (R_1, R_2) satisfying

$$\begin{aligned} R_1 &< \min\{d_{41}, g_{41}\} \\ R_2 &< \min\{e_{41}, h_{41}\} \end{aligned} \tag{173}$$

where

$$\begin{aligned} g_{41} &= C\left(|G_{12}|^2 P_1 + |G_{32}|^2 P_3\right) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \\ h_{41} &= C\left(|G_{21}|^2 P_2 + |G_{31}|^2 P_3\right) - C\left(\frac{1}{\hat{\sigma}_3^2}\right) \end{aligned}$$

for some $\hat{\sigma}_3^2 > 0$. The SNNC-DF rate region is the union of the DF and SNNC rate regions.

2) Slow Rayleigh Fading: Define the events

$$\begin{aligned} D_{\text{DF}} &= \left\{ \begin{array}{l} R_{\text{tar}_1} < a_{41} \\ R_{\text{tar}_2} < b_{41} \\ R_{\text{tar}_1} + R_{\text{tar}_2} < c_{41} \end{array} \right\} \\ D_{\text{CF-S11}} &= \left\{ R_{3(\text{bin})} < C\left(\frac{|G_{31}|^2 P_3}{1 + |G_{21}|^2 P_2}\right)\right\} \\ D_{\text{CF-S12}} &= \left\{ R_{3(\text{bin})} \geq C\left(\frac{1}{\hat{\sigma}_3^2} + \frac{|G_{23}|^2 P_2}{\hat{\sigma}_3^2 (1 + |G_{21}|^2 P_2)}\right)\right\} \\ D_{\text{CF-S21}} &= \left\{ R_{3(\text{bin})} < C\left(\frac{|G_{32}|^2 P_3}{1 + |G_{12}|^2 P_1}\right)\right\} \\ D_{\text{CF-S22}} &= \left\{ R_{3(\text{bin})} \geq C\left(\frac{1}{\hat{\sigma}_3^2} + \frac{|G_{13}|^2 P_1}{\hat{\sigma}_3^2 (1 + |G_{12}|^2 P_1)}\right)\right\} \\ D_{\text{SNNC1}} &= \left\{ \hat{\sigma}_3^2 \geq \frac{1}{|G_{32}|^2 P_3} \right\} \\ D_{\text{SNNC2}} &= \left\{ \hat{\sigma}_3^2 \geq \frac{1}{|G_{31}|^2 P_3} \right\}. \end{aligned}$$

The DF region is the union of all (R_1, R_2) satisfying (170). The CF-S region is the union of all (R_1, R_2) satisfying

$$R_1 < R_{\text{CF-S1}} = \begin{cases} d_{41} & \text{if } D_{\text{CF-S21}} \cap D_{\text{CF-S22}} \\ d_{42} & \text{if } D_{\text{CF-S21}} \cap D^{\text{c}}_{\text{CF-S22}} \\ d_{43} & \text{otherwise} \end{cases} \tag{174}$$

$$R_2 < R_{\text{CF-S2}} = \begin{cases} e_{41} & \text{if } D_{\text{CF-S11}} \cap D_{\text{CF-S12}} \\ e_{42} & \text{if } D_{\text{CF-S11}} \cap D^{\text{c}}_{\text{CF-S12}} \\ e_{43} & \text{otherwise} \end{cases} \tag{175}$$

where

$$\begin{aligned} d_{42} &= C\left(|G_{12}|^2 P_1\right) \\ d_{43} &= C\left(\frac{|G_{12}|^2 P_1}{1 + |G_{32}|^2 P_3}\right) \\ e_{42} &= C\left(|G_{21}|^2 P_2\right) \\ e_{43} &= C\left(\frac{|G_{21}|^2 P_2}{1 + |G_{31}|^2 P_3}\right). \end{aligned}$$

The optimal $R_{3(\text{bin})}$ and $\hat{\sigma}_3^2$ are calculated numerically.

Referring to Theorem 1, SNNC achieves all pairs (R_1, R_2) satisfying

$$R_1 < R_{\text{SNNC1}} = \begin{cases} \min\{d_{41}, g_{41}\} & \text{if } D_{\text{SNNC1}} \\ d_{43} & \text{otherwise} \end{cases} \tag{176}$$

$$R_2 < R_{\text{SNNC2}} = \begin{cases} \min\{e_{41}, h_{41}\} & \text{if } D_{\text{SNNC2}} \\ e_{43} & \text{otherwise.} \end{cases} \tag{177}$$

The SNNC-DF rate region is the union of the (R_1, R_2) satisfying

$$R_1 < R_{\text{SNNC-DF1}} = \begin{cases} R_{\text{DF1}} & \text{if } D_{\text{DF}} \\ R_{\text{SNNC1}} & \text{otherwise} \end{cases} \tag{178}$$

$$R_2 < R_{\text{SNNC-DF2}} = \begin{cases} R_{\text{DF2}} & \text{if } D_{\text{DF}} \\ R_{\text{SNNC2}} & \text{otherwise.} \end{cases} \tag{179}$$

The outage probabilities are:

$$\begin{aligned} &P^{\text{out}}_{\text{DF}} = \Pr[\{R_{\text{DF1}} < R_{\text{tar1}}\} \cup \{R_{\text{DF}_2} < R_{\text{tar2}}\}] \\ &P^{\text{out}}_{\text{CF-S}} = \Pr[\{R_{\text{CF-S1}} < R_{\text{tar1}}\} \cup \{R_{\text{CF-S2}} < R_{\text{tar2}}\}] \\ &P^{\text{out}}_{\text{SNNC}} = \Pr[\{R_{\text{SNNC1}} < R_{\text{tar1}}\} \cup \{R_{\text{SNNC2}} < R_{\text{tar2}}\}] \\ &P^{\text{out}}_{\text{SNNC-DF}} = \Pr[\{R_{\text{SNNC-DF1}} < R_{\text{tar1}}\} \cup \{R_{\text{SNNC-DF2}} < R_{\text{tar2}}\}] \end{aligned} \tag{180}$$

REFERENCES

[1] S. Lim, Y.-H. Kim, A. El Gamal, and S.-Y. Chung, "Noisy network coding," *IEEE Trans. Inf. Theory*, vol. 57, no. 5, pp. 3132–3152, May 2011.

[2] R. Ahlswede, N. Cai, S.-Y. Li, and R. Yeung, "Network information flow," *IEEE Trans. Inf. Theory*, vol. 46, no. 4, pp. 1204–1216, July 2000.

[3] A. Dana, R. Gowaikar, R. Palanki, B. Hassibi, and M. Effros, "Capacity of wireless erasure networks," *IEEE Trans. Inf. Theory*, vol. 52, no. 3, pp. 789–804, March 2006.

[4] N. Ratnakar and G. Kramer, "The multicast capacity of deterministic relay networks with no interference," *IEEE Trans. Inf. Theory*, vol. 52, no. 6, pp. 2425–2432, June 2006.

[5] A. Avestimehr, S. Diggavi, and D. Tse, "Wireless network information flow: A deterministic approach," *IEEE Trans. Inf. Theory*, vol. 57, no. 4, pp. 1872–1905, April 2011.

[6] G. Kramer and J. Hou, "Short-message quantize-forward network coding," in *2011 8th Int. Workshop on Multi-Carrier Systems Solutions (MC-SS)*, Herrsching, Germany, May 2011, pp. 1–3.

[7] ——, "On message lengths for noisy network coding," in *IEEE Inf. Theory Workshop (ITW)*, Paraty, Brazil, Oct. 2011, pp. 430–431.

[8] X. Wu and L.-L. Xie, "On the optimal compressions in the compress-and-forward relay schemes," *submitted to IEEE Trans. Inf. Theory*, Feb. 2011. [Online]. Available: http://arxiv.org/abs/1009.5959/

[9] G. Kramer, M. Gastpar, and P. Gupta, "Cooperative strategies and capacity theorems for relay networks," *IEEE Trans. Inf. Theory*, vol. 51, no. 9, pp. 3037–3063, Sept. 2005.

[10] B. Schein, "Distributed coordination in network information theory," Ph.D. dissertation, MIT, Cambridge, MA, USA, 2001.

[11] J. L. Massey, *Applied Digital Information Theory*, ETH Zurich, Zurich, Switzerland, 1980-1998.

[12] A. Orlitsky and J. Roche, "Coding for computing," *IEEE Trans. Inf. Theory*, vol. 47, no. 3, pp. 903–917, March 2001.

[13] T. Cover and J. Thomas, *Elements of Information Theory*, 2nd ed. New York: Wiley, 2006.

[14] G. Kramer, "Capacity results for the discrete memoryless network," *IEEE Trans. Inf. Theory*, vol. 49, no. 1, pp. 4–21, Jan. 2003.

[15] A. El Gamal and Y.-H. Kim, *Network Information Theory*. Cambridge University Press, 2011.

[16] P. Zhong, A. Haija, and M. Vu, "On compress-forward without Wyner-Ziv binning for relay networks," *submitted to IEEE Trans. Inf. Theory*, 2011. [Online]. Available: http://arxiv.org/abs/1111.2837/

[17] L.-L. Xie and P. Kumar, "An achievable rate for the multiple-level relay channel," *IEEE Trans. Inf. Theory*, vol. 51, no. 4, pp. 1348–1358, April 2005.

[18] L. Ozarow, S. Shamai, and A. Wyner, "Information theoretic considerations for cellular mobile radio," *IEEE Trans. on Veh. Technol.*, vol. 43, no. 2, pp. 359–378, May 1994.

[19] T. Cover and A. E. Gamal, "Capacity theorems for the relay channel," *IEEE Trans. Inf. Theory*, vol. 25, no. 5, pp. 572–584, Sept. 1979.

[20] J. Laneman, D. Tse, and G. Wornell, "Cooperative diversity in wireless networks: Efficient protocols and outage behavior," *IEEE Trans. Inf. Theory*, vol. 50, no. 12, pp. 3062–3080, Dec. 2004.

[21] L. Sankaranarayanan, G. Kramer, and N. Mandayam, "Hierarchical sensor networks: capacity bounds and cooperative strategies using the multiple-access relay channel model," in *2004 First Annual IEEE Commun. Soc. Conf. on Sensor and Ad Hoc Commun. and Networks*, Santa Clara, Oct. 2004, pp. 191–199.

[22] B. Rankov and A. Wittneben, "Achievable rate regions for the two-way relay channel," in *IEEE Int. Symp. Inf. Theory*, Seattle, USA, July 2006, pp. 1668–1672.